

Available in sizes from 1/16 to 2in (2mm to 38mm)



BMT Co., Ltd.
www.superlok.com

Greetings

We, BMT Co., Ltd. are high precision mechanical components manufacturer specialized in the field of Automotive, Aerospace, Semiconductor, shipbuilding and petrochemical industries since its foundation in 1988.

We have been successfully nominated as an official supplier and manufacturer of Tube Fittings & Valves by the big companies (SAMSUNG Electronics, LG Electronics, Hyundai etc) and it was landmark for BMT to be evaluated for its high technology at the related industries.

BMT's key capability are Technology and Know-how accumulated from long experience in the field, High Productivity with modernization & automation and consistent High Quality by strict quality control system.


Our mission is to supply our products, **SUPERLOK**, with high quality and high reliability to our customers through continuous R&D investment and strong quality control system.

Our ultimate goal is to be a Technically Leading Company in Tube Fittings & Valves and make our brand, **SUPERLOK**, to be World's Best.

저희 BMT는 1988년 설립이후, 자동차, 항공우주, 반도체, 조선, 석유화학플랜트 산업등에 사용되는 정밀기계 부품을 생산하는 부품소재 전문기업으로 성장해 왔으며, 국내 우수기업들(삼성, LG, 현대 등)로부터 Tube Fitting & Valve의 공식 납품업체로 지정됨으로서, 그 기술력을 대외적으로 인정받게 되었습니다.

저희 BMT의 핵심역량은, 오랜 경험으로부터의 축적된 기술력과 노하우에 있으며, 또한 현대화된 공장 자동화 시스템과 생산 관리 시스템을 통한 높은 생산성, 체계적이고 정형화된 품질 관리 시스템을 통한 고품질의 제품 생산에 있다고 할 수 있습니다.

저희 BMT는 지속적인 R&D투자를 통한 기술선도와 엄격한 품질관리를 통한 고 신뢰성 제품의 생산으로 고객 만족을 위하여 최선을 다할 것이며, 고객과 함께 성장하는 기업이 되도록 노력 할 것입니다. 또한, 21세기 국가 산업 발전의 일익을 담당하며, 세계속의 한국 기업이 되기 위하여, 자사 브랜드인 **SUPERLOK**을 세계적인 제품으로 성장시키며, 이 분야의 기술을 선도하는 세계 기업으로 성장하여, 고객 여러분의 기대에 부응하는 기업이 되고자 항상 노력할 것을 약속드립니다.

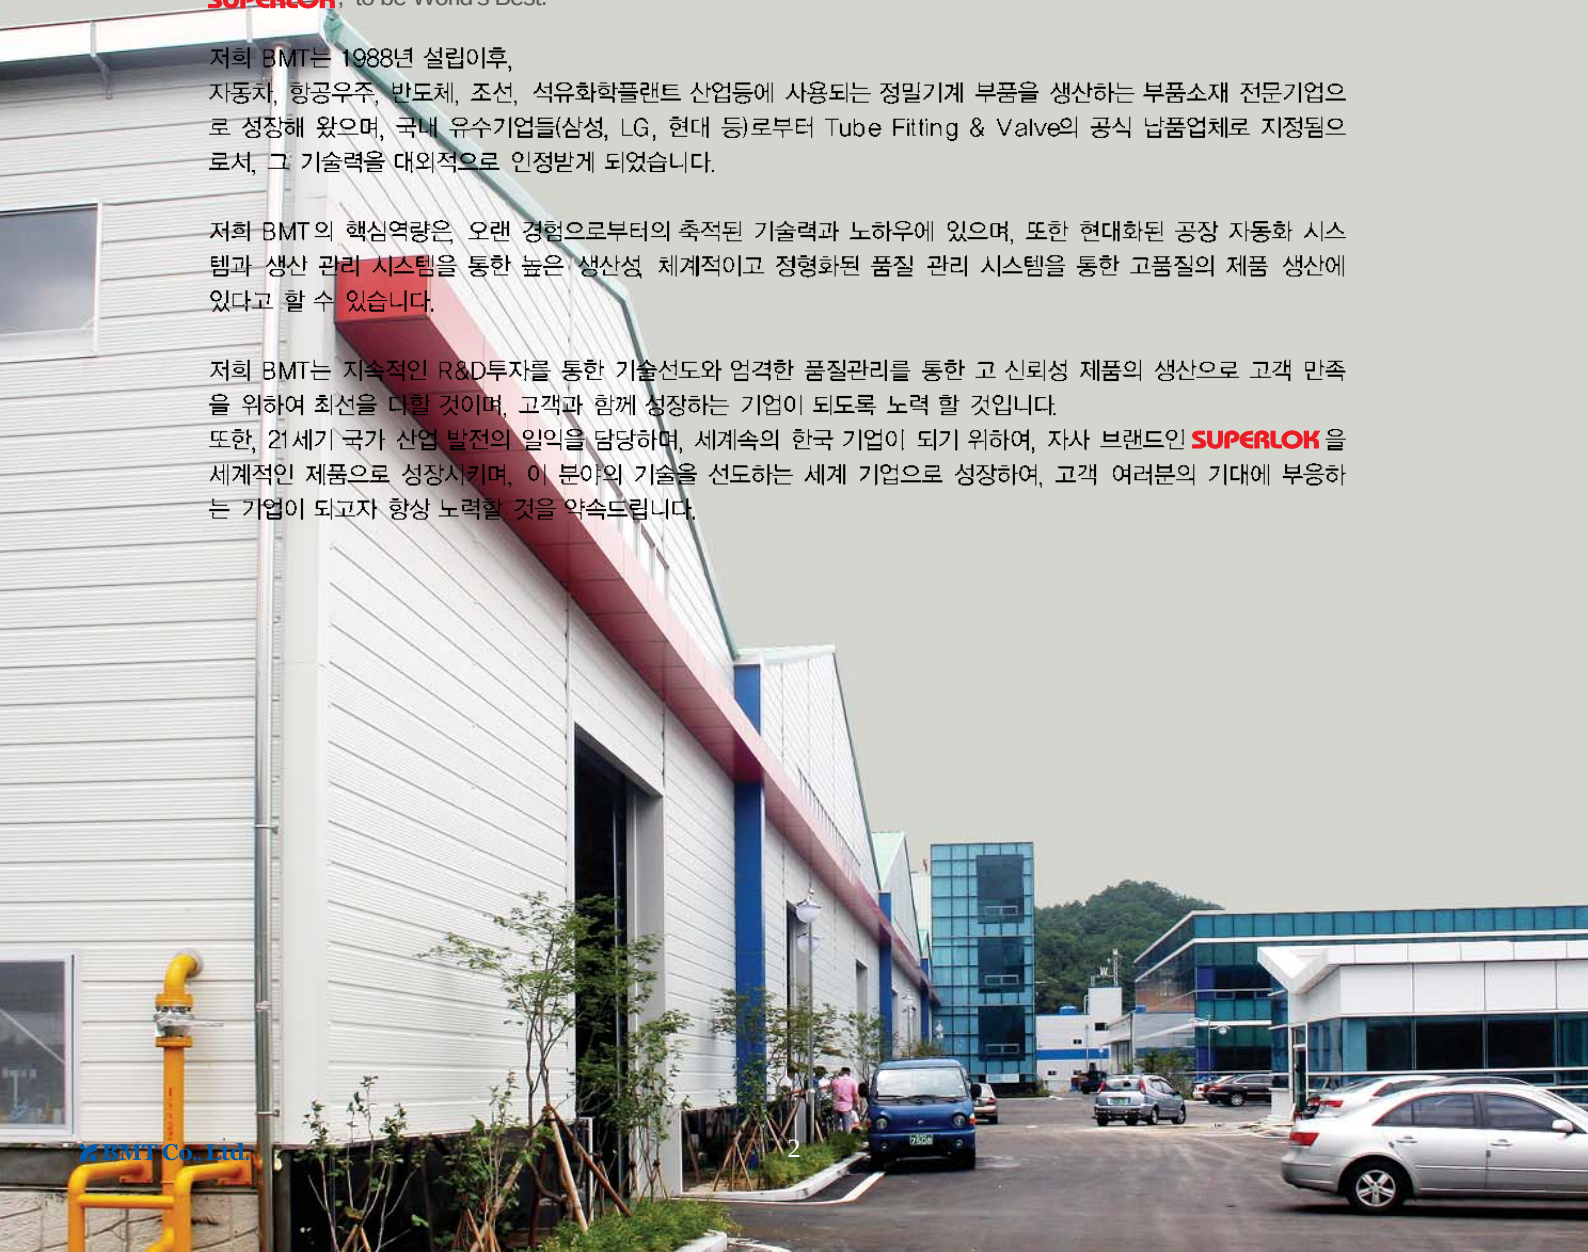



History Of BMT Co., Ltd

2009

- Achieved GOST-R (Russian Importing License) for F / V.
- ECE R 110 & ISO 15500 TUV NORD certificate (Number: RDW-99050016, the Approval of Special Components of the Vehicles Using Compressed Natural Gases in their Propulsion System)
- Supplied DBB to Sarawak SHELL Berhad (SSB), project named CILI PADI GAS FIELD Development and Engineered by TECHNIP.
- Have certified the ASME "N, NS, NPT" stamp from the ASME Survey Team.
- Approved from ConocoPhillips Indonesia for supplying "SUPERLOK" product.

2008

- Approved as a Vendor to Major Companies in the Leading Industries.
- Marine Engineering & Shipbuilding Industry: Samsung Heavy Ind. (SHI), Daewoo Shipbuilding & Marin Eng. (DSME), Hyundai Heavy Ind. (HHI) and Total Pazflor FPSO Project by Total S.A.
- Power Plant Industry: Korea Hydro & Nuclear Power Co. (KHNP), Korea West Power Co. (WP) and 5 all power plant companies in Korea.
- EPC Industry: SK Eng. & Const., Samsung Eng., Hyundai E&C, Daewoo E&C, GS E&C, and Kukdong E&C.
- Oil & Gas, Refinery Industry: AOC in Kuwait, SK Energy, GS-Caltex (Oil Refining, Crude Oil, Petroleum, Lubricants and Chemicals), and PETRONAS Gr. in Malaysia.

2007

- OHSMS 18001 (HSBRK-S015: Occupational Health and Safety Management System Certificate)
- ISO 14001 (HSBRK-E118: Environmental Management System Certificate)
- GL (Germanischer Lloyd) ■ API (American Petroleum Institute)
- KEPIC, Certificate of Qualification (Korea Electric Power Industry Code)
- Undergoing--ASME (American Society of Mechanical Engineers) N Stamp
- BMT have secured and exported the product of SUPERLOK brand to more than 20 countries including the USA, China, South-East, Middle-East, Europe and so on as of this year.
- Started to supply SUPERLOK product to KHNP (Korea Hydro & Nuclear Power company), SHI and DSME, SK Energy and GS-Caltex, and GS EC. REGISTRATION IN THE MAJOR COMPANIES
- Registered as an official Supplier in SHI (Samsung Heavy Industries) and DSME (Daewoo Shipbuilding & Marin Engineering)
- Registered as an official Supplier in WP (West), KOMIPO (Midland), KOSPO (Southern), and KSEP (South-East Power)
- Registered as an official Supplier in SK Corporation, GS-Caltex (Oil Refining, Crude Oil, Petroleum, Lubricants, Chemicals) and GS Engineering & Construction Corp.
- Registered as an official Supplier in Petronas Gr. Malaysia and started supply of SUPERLOK Double block & Bleed Valves and others.
- BMT has been listed on the Public Stock Exchange as of Nov. 2, 2007. (KOSDAQ : Korea Securities Dealers Automated Quotations)

2006

- ABS (American Bureau of Shipping) ■ Lloyd (Lloyd's Register of Shipping)
- DNV (Det Norske Veritas / Norwegian Assoc.) ■ Awarded 3 Million dollars Exporting Tower
- Designated an Excellence Quality Company by Ministry of Commerce, Industry and Energy
- Registered as an official Supplier in EWP (Korean East-West Power Co., Ltd.).

2005

- Established an R&D Institute.
- Awarded The Grand Prix of the Busan Enterprises in the Technical Field.
- Made a manager contract with Dong Yang Securities Co. regarding IPO.
- Registered a Patent and a Design of MCPD (Molded Case Power Distributor) and began an Electric business.

2004

- Selected as a "Promising Company" by an Industrial Bank of Korea (KIUP Bank)
- Confirmed as a "Materials and Components Professional Comp."
- Confirmed as a "Innovation Business Company" by SMBA
- Designated as a "Superior Exporting Firm" by SMBA

2003 ~ 2000

- Designated as a Official Vendor in Supplying Tube Fittings and Valves by Samsung Electronics.
- Selected as a "New Technology Venture Business" by Small and Medium Biz Administration (SMBA)
- Selected as a "Superior Technology Co." by Korea Technology Credit Guarantee Fund (KOTEC)
- Achieved Certificate of ISO 9001 (ISO 2001) ° Registered the Brand "SUPERLOK"
- Changed the CO. Name to "BMT Co., Ltd."

1988

- Established GyeongPoong Machinery Co

Certificates




■ ISO 14001



■ ISO 9001



■ ISO 18001

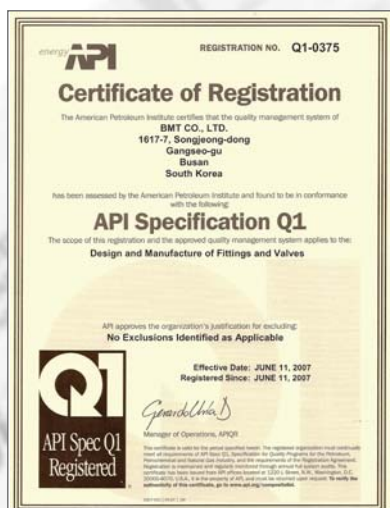

■ API-SPECQ1



■ DNV-P-12285



■ GL CERT-SUPERLOK



■ ABS 06-BK150238-PDA



■ LR 06.10006




■ ECE R110



UNION		TEE		AN TUBE	
SU Union page 15		SUT Union Tee page 39		SAF An Flare page 58	
SRU Reducing Union page 16		SRUT Reducing Union Tee page 40		SAU An Union page 59	
SBHRU Bulkhead Reducing Union page 17		SMBT Male Branch Tee page 41		SAA An Adapter page 59	
SBHU Bulkhead Union page 18		SPMBT Positionable Male Branch Tee page 42		O-RING SEAL	
CONNECTOR		SMRT Male Run Tee page 44		SOSC O-Seal Straight Thread Connector page 60	
SMC Male Connector page 19		SPMRT Positionable Male Run Tee page 45		SOPC O-Seal Pipe Thread Connector page 60	
SGMC Male Connector For Bonded Washer Seal page 23		SFBT Female Branch Tee page 47		SSMC SAE/MS Male Connector page 61	
SOMC Male Connector For Metal Gasket Seal page 24		SFRT Female Run Tee page 48		WELD END	
SFC Female Connector page 25		SUC Union Cross page 49		SPWC Male Pipe Weld Connector page 66	
SGC Gauge Connector page 27		STUB TUBE CONNECTOR		SMPWE Male Pipe Weld Elbow page 67	
SBMC Bulkhead Male Connector page 28		SR Reducer page 51		SSWC Socket Weld Connector page 67	
SBFC Bulkhead Female Connector page 29		SBR Bulkhead Reducer page 53		SSWE Socket Weld Elbow page 67	
ELBOWS		SMA Male Adapter page 54		PLUG & CAP	
SUE Union Elbow page 31		SFA Female Adapter page 55		SP Plug page 68	
SME Male Elbow page 32		SPC Port Connector page 56		SC Cap page 68	
SHME 45° Male Elbow page 35		SRPC Reducing Port Connector page 57		SPARE PART	
SPHME 45° Positionable Male Elbow page 36		SFTC Flange Lapped Tubes Connector page 58		SN Nut page 69	
SPME Positionable Male Elbow page 36				SFF Front Ferrule page 69	
SFE Female Elbow page 38				SBF Back Ferrule page 70	
				SFS Ferrule Set page 70	
				SI Insert page 70	
				SBR Bulkhead Retainer page 71	
				SVP Vent Protector page 71	

Ordering Information

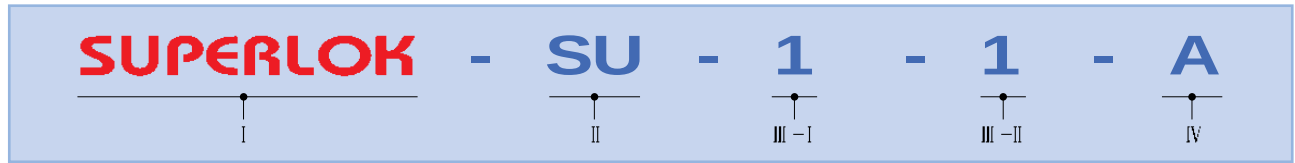

I : **SUPERLOK** Tube Fitting II : Fitting Type III : Fitting Size (III - I : Tube O.D, III - II : Pipe Thread Size or Tube Size) IV : Material

I : **SUPERLOK** Tube Fitting

II : Type of Fitting

SU : Union **SMC** : Male Connector **SUE** : Union Elbow **SUT** : Union Tee
SWC : Weld connector **SR** : Reducer **SSMC** : SAE/MS O-Ring Male Connector **SAU** : An union **SP** : Plug

※ Referred to catalogue Index

III : Size of Fitting

III - I : Tube O.D

Fractional Tube	O.D (Inch)	1/16	1/8	3/16	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1	1-1/4	1-1/2	2
Identify		1	2	3	4	5	6	8	10	12	14	16	20	24	32
Metric Tube	O.D (mm)	2	3	4	6	8	10	12	16	20	22	25	28	32	38
Identify		2M	3M	4M	6M	8M	10M	12M	16M	20M	22M	25M	28M	32M	38M

III - II : Pipe Thread Size or tube size

SIZE (INCH)	1/8	1/4	3/8	1/2	3/4	1	Applied Size
ISO TAPERED	2R	4R	6R	8R	12R	16R	JIS B0203(PT), DIN2999, BSPT
NPT	2N	4N	6N	8N	12N	16N	ANSI B1.20.1
ISO PARALLEL	2G	4G	6G	8G	12G	16G	JIS B0202(PF), ISO 228/1, BSPP
UNIFIED SCREW	2U	4U	6U	8U	12U	16U	AMERICAN STANDARD UNIFIED SCREW THREAD

IV : Material


MATERIAL	Aluminum (Use dash "-")	Brass and Copper (Use dash "-")	Carbon Steel ** (** : Refer to Alloy No.)	Stainless Steel*** (*** : Refer to Alloy No.)	Monel Alloy 400	Inconel Alloy 600
Identify	A	B	C**	SS**	M	INC

Example

* SMC8-6N SS316L
 SUPERLOK MALE CONNECTOR, Tube O.D: 1/2", Thread :3/8"NPT,
 Stainless Steel 316L

* In case of Stainless Steel,
 it is possible to express SS316 or 316 itself.

TEES and CROSSES



- TEES are described by the size of 1 & 2 and then the branch (3).
- CROSSES are described by the size of 1 & 2 and then the branch (3 & 4).

Ex. 1) SMT6 - 6N - SS316

MALE BRANCH TEE 3/8" × 3/8" × 3/8" NPT Stainless steel 316

Ex. 2) SUC - 8 - M

UNION CROSS 1/2" × 1/2" × 1/2" × 1/2" Monel 400

* Products are for reference only and are subject to change on client's request.



Features of SUPERLOK Tube Fittings



SUPERLOK Tube Fitting is produced by a strict material management, a high precision design and the best processing technology.

SUPERLOK Tube Fitting is tightened softly in linking and is leakage free entirely under shock, impact and high tension. Therefore, it can contribute for productivity improvement and cost reduction to SUPERLOK Tube Fitting users because It's the best product whose flow of fluid is very smooth caused by Fitting's excellent inner surface condition.

SUPERLOK can be assembled easily without any other special tool but the use of low quality tubing may deteriorate Fitting's function.

Structure of SUPERLOK

The whole system design should be considered so that there is no problem to secure reliable safety.

SUPERLOK is consists of 4 precision parts and all parts are being manufactured through a very strict tolerance superintendence under systematic and constant quality control.

All parts that are being made by this process can cope with the inferior enviromental conditions and various customer's needs.

SUPERLOK Tube Fitting secures the leakage prevention and sufficient tightness with less forces in all the tubing connections and reduces the cost and potential leakage risk in a course of tubing assembly and process.



■ Quality and Process Control

BMT's SUPERLOK Tube Fitting & Valve are produced as the product of best quality through a statistical process control and a strict quality control (various test and the self-examination included) and the written systematic quality control assurance.

■ Warranty of Quality and Exchange

BMT warrants that SUPERLOK Tube Fitting is being manufactured without defect in raw materials and manufacturing process, with the guarantee of its construction and workmanship of enough quality control and process control according to the specifications.

However, the defect owing to user's recklessness, an unreasonable assembling method and operation and the operation disregarding manufacturer's indications can not be compensated.

In case that leakage happens by the defect on SUPERLOK Tube Fitting in spite of normal operation, all the defected fittings shall be exchanged immediately.

SUPERLOK acknowledges this leaflet is regarded as warranty and does not publish separate warranty as long as special requirement issues are not required.

SUPERLOK Installation Instruction

1. Installation under 1 inch or 25MM

SUPERLOK Tube Fitting shall be delivered to customer with completely assembled state, so be ready to immediate use only with finger-tightening. Disassembling the product prior to use can be a cause of leakage or a cause of inflow something into the fitting's inside. Do not use for the poor quality tubes, which can be a cause of leakage or functional deterioration.

SUPERLOK Tube Fittings are installed in three easy steps:

Step 1

Insert the tubing into SUPERLOK Tube Fitting's inside. At this moment, make sure that the tubing is completely contact with the shoulder of fittings and then finger-tighten the nut.

Step 2



Before tightening the SUPERLOK nut, mark the starting point of turning at the 6 o'clock position.

Step 3

Hold the fitting body safely with a backup wrench and tighten the nut 1-1/4 turns. (pay attention to the mark of starting point of turning, make one revolution and place at 9 o'clock position. Marking the starting point of turning at the 6 o'clock position will let you notice where the starting point is).

After 1-1/4 revolution, when the starting point is placed at 9 o'clock position, you can easily confirm and see that SUPERLOK Tube Fitting is installed accurately.

After 1-1/4 revolution of the SUPERLOK nut by finger-tightening, make sure whether it is sufficiently tightened using by the Gap Inspection Gage.

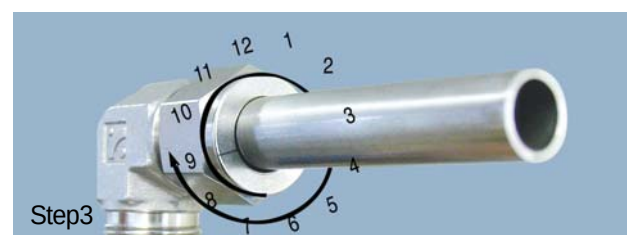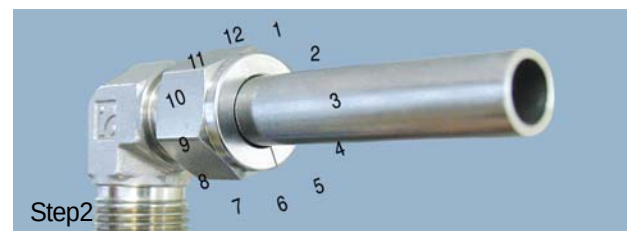



2. Installation at the high pressure or the high safety systems

Since there are various variations of tubing, unifying the starting point of the fitting is desirable. The starting point is determined by that when tighten the nut by using a wrench until the tubing shall not be turn freely in the fitting. At this point, make the 1-1/4 revolution and tighten the nut.

(If tube rotation is not possible, tighten the nut approximately 1/8 turn from the finger-tight position)




Safety Considerations on Installations for High Pressure System

(Apply to the installation of general system)

1. Make sure whether the thickness and material of tubing is proper to applicable usage. The material of tubing is compatible with the material of fitting and the hardness of tubing shall be less than that of fitting.
2. Do not assemble or disassemble the fitting when the pressure is hold at the system.
3. Since straightly assembled tubing to a pair of fixed fitting cannot be completely contacted with the both sides of fittings' shoulder, there shall be a leakage risk caused by deformation from high temperature and high pressure.
4. Do not turn the fitting body.

3. Re-tightening Instruction

1. Shown the disconnected position of fittings.
2. When inserting the tubing with preswaged ferrule into the fitting body, the front ferrule shall be seated in the fitting body.
3. Finger-tighten the nut and revolve the nut to the original position with a wrench. At the original position, the resistance increases. At the point, the job will be done by tightening slightly more.

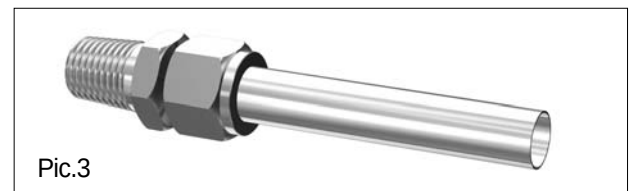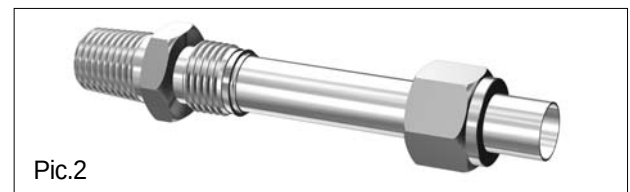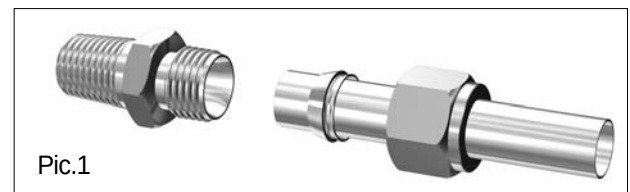

Technological Information

■ Hardness Limitation

Generally, heat treated tubing shall be used in Metal tubing so that can be used properly with SUPERLOK tube fitting.

Hardness of stainless steel tubing is being limited below HRb90 but large majority of users are using the hardness of tube limited below HRb80. On the other hand, it is actually economical to use tubing by lowering the hardness of tubing because the assembly is easy and tubing can be bent easily. Therefore, SUPERLOK encourage customers to use tubing with the hardness

below HRb 80. This is for customer's convenience and perfect leakage prevention in operation.

■ Compatibility

SUPERLOK is manufactured in order to be compatible with other firm's tube fitting from the beginning of design so that can warrant 100% confidence in case of being made under the mutual control of tolerance and hardness with other firm. But it is safe to operate with only SUPERLOK products if possible.

■ Application Gas System

SUPERLOK is appropriate as the standard for making use of gas system, but potential leakage can be prevented by the implementation of the below standards.

Tubing standard in gas system (Apply to the installation of general system)

1. The hardness of tubing shall be less than those of fitting.
2. Surface of tubing must be free from scar, defect, pollution and etc. Shall be flexible and expansion of tubing should be easy.
3. Refer to Table 2, 3, 4, 5 for tubing choice of suitable gas system.
4. End part shape of tubing should not be deformed especially. (For example, the ending part of tubing should not be an oval.)
5. End of tubing must be perpendicular to the center line of tubing and be deburred. For these reason, tube cutting machine must have a sharp blade and deburring tools should be used.
6. Firm connection shall be performed. Insufficient connection is the main cause of leakage and failure of system.
7. Do not bend tubing after inserting tubing into the fitting.
8. Observe the procedure of operation which is suggested by our firm.
9. Use minimum wall thickness of below table in order to secure maximum safety in gas system.

■ MATERIAL

SUPERLOK tube fitting are available as standard in stainless steel, brass, and alloy material. Straight fittings are machined from cold finished bar stock and shaped bodies from forgings. Specifications for fitting materials are listed below. For special applications, contact your local distributors.

Material	Bar Stock	Forging
316 SS	ASTM A479 ASTM A276	ASTM A182
Monel, Alloy 400	ASTM B164	ASTM B 564
Inconel, Alloy 600	ASTM B 166	ASTM B 564
Hastelloy, Alloy C-276	ASTM B 574	ASTM B 564
Brass	ASTM B 16 ASTM B 453	ASTM B 283

■ Application to Cryogenic and High Temperature System

SUPERLOK Tube Fitting is suitable for vacuum system as well as the situation of high pressure and from cryogenic condition to high temperature. SUPERLOK Tube Fitting has been tested repeatedly under various conditions.

Maximum Temperature by Materials

Aluminum	400 °F	204 °C
Copper	400 °F	204 °C
Steel	375 °F	191 °C
SUS304	1000 °F	538 °C
SUS316	1200 °F	649 °C
MONEL	800 °F	427 °C

Please refer to ASME B31.3-1993 concerning the detailed information about the maximum & minimum temperature of various materials.


■ THREADS

1. NPT (National Pipe Thread)

- Thread angle 60°
- Tapered angle 1°47'
- Manufactured by the standard of ANSI B2.1

2. ISO 7/1 Taperad Thread

- Thread angle 55°
- Tapered angle 1°47'
- Equivalent to the standard of DIN2999 BS21(BSPT) and JIS B0203(PT).



ISO Tapered
(thread sealant required)


3. ISO 228/1 Parallel Thread

- Thread angle 55°
- Equivalent to the standard of BS 2779 (BSPP), JIS B0202 (PF).
- As the thread in accordance with ISO 228/1 cannot be sealed perfectly, the sealing shall be done by the following method.
- Use a gasket or O-Ring to seal.



① Bonded Washer Seal


Be sealed by contacting the inclined surface of the hex body of male thread to the surface of the female thread.



In case of sealing, a washer which composed of metal and elastic material is located at the center of tapered surface.


thread's inside.

The sealing shall be completed with pushing the gasket by male thread surface.



② Metal Gasket Seal

A Metal gasket(generally copper) is sealed between the body of male thread and the surface of female thread.



③ Metal Gasket Seal

This is a method to insert a gasket into the flat surface of

4. UNF Thread

- Thread angle 60°
- This is classified into UN, UNC and UNF. The standard is classified by the diameter of thread and the number of threads per inch.

Tube Standard Information

■ Tube Selection

Suitable tubing selection is essential in performance of tubing system.

When selecting tubing material, size and wall thickness, customer must consider pressure, flux (flow), temperature, environment and compatibility of system.

Consideration facts at the selection of tube

1. Quality of the tube materials & manufacturing method.
2. Thickness and outer diameter of tube.
3. Surface treatment of tube .
4. Hardness of tube.
5. Concentricity of tube.

■ Tube Bending

In case of bending tubing near at SUPERLOK fittings, there should be enough lineal distance from bending point to the fittings as this can be a reason of leakage. (see the below Table).

This is essential to protect customer's system from the leakage. The required straight line length of tube should be bigger than tube diameter. For more detailed specifications and technology data, we suggest you to contact SUPERLOK engineers.

• The recommended straight line length of tube in Tube bending

Tube O.D. (inch)	1/8	3/16	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1
L(mm) 직선 튜브길이	12.70	18.25	19.05	20.63	22.20	23.81	30.16	31.75	33.30	38.10

※ L: The straight line length of tubing from the ending part of tubing to the beginning part of bending

■ The requirements for tube quality of the material

Carbon steel tubing

- ASTM A179 or equivalent.
- Carbon steel tubing for an oil pressure usage of high quality, annealed and seamless.
- Maximum hardness : HRb72.
- Tubing must be free from scars and shall be suitable for bending and expansion works.

Copper tubing

- ASTM B68, B75 or equivalent.
- Copper tubing of high quality, annealed and seamless.

Stainless steel tubing

- ASTM A213, A269 or equivalent.
- Stainless steel tubing of high quality, annealed and seamless.
(316, 304, 321, etc.)
- Hardness : below HRb 80.
- Tubing must be free from scars and shall be suitable for bending and expansion works.

Monel tubing

- ASTM B165 or equivalent.
- 400 alloy tubing of high quality, annealed and seamless.

- Hardness : below HRb 75.
- Tubing must be free from scars and shall be suitable for bending and expansion works.

■ A pressure Grade Coefficient of Tubing owing to Temperature Change.

Table 1

° F	° C	Copper	304SS	316SS	Monel
200	93	0.80	1.00	1.00	0.88
400	204	0.50	0.93	0.96	0.79
600	316	---	0.82	0.85	0.79
800	427	---	0.76	0.79	0.76
1000	538	---	0.69	0.76	---
1200	649	---	0.30	0.37	---

Multiply the allowable working pressure in Table 2 by the coefficient in Table1 in order to decide allowable pressure at high temperature.

(See page 12, 13)

Example

SUS316
(3/8" O.D of tube) × (0.049" wall thickness)
1200°F : 4800 psi × 0.37 = 1776 psi

The applicable operation pressure of SUS 316 tubing for wall thickness, 3/8" O.D × 0.049", is 1776 psi at 1200°F



Technological Data

Table 2 Stainless Steel Tubing

Stainless Steel tubing which is high quality (such as 304, 316, 316L and so on), fully annealed and seamless or welding, ASTM A269, A213 or equivalent.

STAINLESS STEEL FRACTIONAL TUBE

Tube O.D. (inch)	TUBE WALL THICKNESS (inch)												
	0.010	0.012	0.014	0.016	0.020	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120
1/16	5600	6800	8100	9400	12000								
1/8						8500	10900						
3/16						5400	7000	10200					
1/4						4000	5100	7500	10200				
5/16							4000	5800	8000				
3/8							3300	4800	6500				
1/2							2600	3700	5100	6700			
5/8								2900	4000	5200	6000		
3/4								2400	3300	4200	4900	5800	
7/8								2000	2800	3600	4200	4800	
1									2400	3100	3600	4200	4700

* 가스용 Tubing working pressure(psi) / 허용작업압력(psi)

STAINLESS STEEL METRIC TUBE

Tube O.D. (mm)	TUBE WALL THICKNESS (mm)												
	0.71	0.89	1.00	1.25	1.50	1.65	2.00	2.11	2.41	2.50	2.77	3.00	3.05
3	10800	13800	15300										
4	7900	10100	11500	14400									
6	5000	6500	7400	9400	11500	12700							
8		4700	5800	6800	8400	9300							
10		3700	4200	5300	6500	7300							
12		3000	3400	4400	5300	5900	6800	7200					
16			2500	3200	3900	4300	5300	5700	6600	6800			
18				2800	3400	3800	4700	5000	5800	6000	6700		
20				2500	3000	3400	4200	4400	5100	5300	6000		
22				2300	2800	3000	3800	4000	4600	4800	5400		
25				2000	2400	2700	3300	3500	4000	4200	4700	5100	5200


* 가스용 Tubing working pressure(psi) / 허용작업압력(psi)

Allowable stress value between -20°F and 100°F (-28.9°C ~ 37.8°C) is 19,500 psi
Safety factor is 4 (Ultimate tensile strength is 75,000 psi)


- The above data are based on the minimum wall thickness and the maximum O. D. allowed by and under the standard of ASTM A269.
- The dimensions are not considered to erosion or corrosion.

Union & Connector

UNION	
SU Union	
page 15	
SRU Reducing Union	
page 16	
SBHRU Bulkhead Reducing Union	
page 17	
SBHU Bulkhead Union	
page 18	
CONNECTOR	
SMC Male Connector	
page 19	
SGMC Male Connector For Bonded Washer Seal	
page 23	
SOMC Male Connector For Metal Gasket Seal	
page 24	
SFC Female Connector	
page 25	
SGC Gauge Connector	
page 27	
SBMC Bulkhead Male Connector	
page 28	
SBFC Bulkhead Female Connector	
page 29	

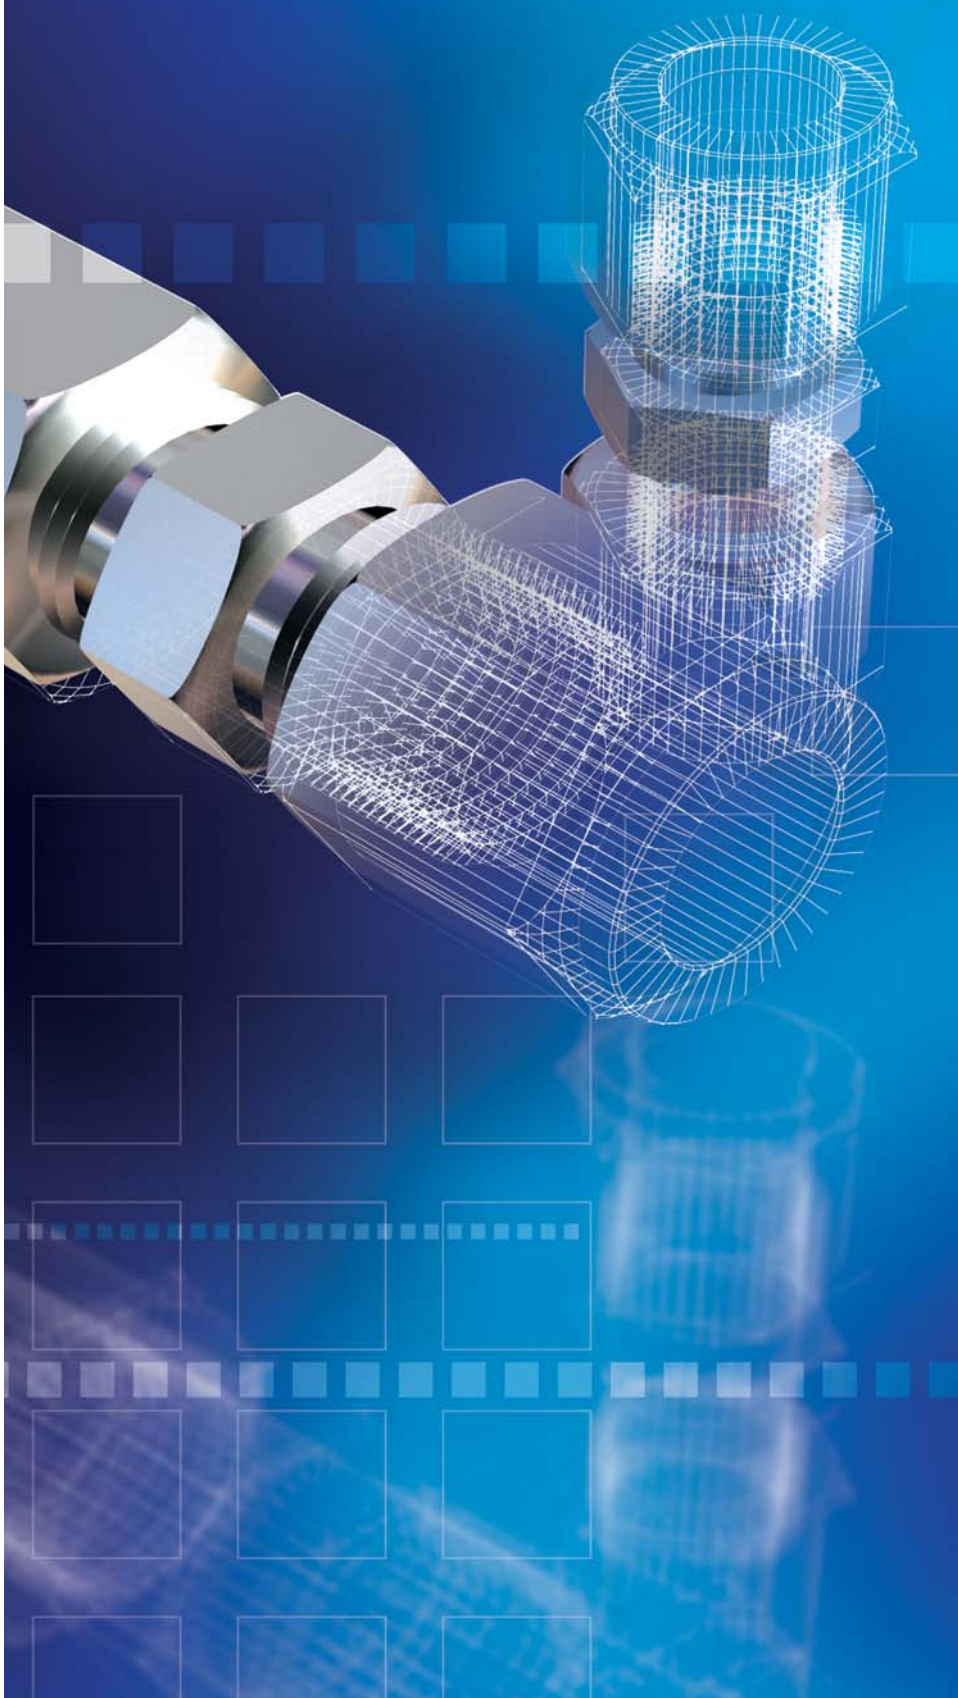

SU Union




Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SU - 1	1/16	1.27	5/16	5/16	8.63	10.92	17.52	25.15
SU - 2	1/8	2.28	7/16	7/16	12.70	15.24	22.35	35.56
SU - 3	3/16	3.04	7/16	1/2	13.71	16.00	24.13	37.33
SU - 4	1/4	4.82	1/2	9/16	15.24	17.78	26.16	40.89
SU - 5	5/16	6.35	9/16	5/8	16.25	18.54	28.19	42.92
SU - 6	3/8	7.11	5/8	11/16	16.76	19.30	30.22	44.95
SU - 8	1/2	10.41	13/16	7/8	22.86	21.84	30.98	51.30
SU - 10	5/8	12.70	15/16	1	24.38	21.84	31.75	52.07
SU - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	33.27	53.59
SU - 14	7/8	18.28	1-3/16	1-1/4	25.90	21.84	34.79	55.11
SU - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	40.38	64.77
SU - 20	1-1/4	27.69	1-3/4	1-7/8	41.15	38.86	48.00	92.20
SU - 24	1-1/2	34.04	2-1/8	2-1/4	50.04	45.21	53.59	107.95
SU - 32	2	45.97	2-3/4	3	67.56	62.74	74.68	149.35

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	Width Across Flat		A	B	I	L
			h	H				
SU - 2M	2	1.7	12	12	12.9	15.3	22.4	35.6
SU - 3M	3	2.4	12	12	12.9	15.3	22.1	35.3
SU - 4M	4	2.4	12	12	13.7	16.1	24.1	37.3
SU - 6M	6	4.8	14	14	15.3	17.7	26.2	41.0
SU - 8M	8	6.4	15	16	16.2	18.6	28.2	43.2
SU - 10M	10	7.9	18	19	17.2	19.5	31.0	46.2
SU - 12M	12	9.5	22	22	22.8	22.0	31.0	51.2
SU - 15M	15	11.9	24	25	24.4	22.0	31.8	52.0
SU - 16M	16	12.7	24	25	24.4	22.0	31.8	52.0
SU - 18M	18	15.1	27	30	24.4	22.0	33.3	53.5
SU - 20M	20	15.9	30	32	26.0	22.0	34.8	55.0
SU - 22M	22	18.3	30	32	26.0	22.0	34.8	55.0
SU - 25M	25	21.8	35	38	31.3	26.5	40.4	65.0

SRU Reducing Union



Connects Fractional Tubes


Part No.	Tube O.D.		d Min	Width Across Flat			A	A ₁	B	B ₁	I	L
	D (inch)	D ₁ (inch)		h (inch)	H (inch)	H ₁ (inch)						
SRU 2 - 1	1/8	1/16	1.27	7/16	7/16	5/16	12.7	8.63	15.24	10.92	20.60	31.00
SRU 3 - 2	3/16	1/8	2.28	7/16	1/2	7/16	13.71	12.70	16.00	15.24	23.36	36.57
SRU 4 - 2	1/4	1/8	2.28	1/2	9/16	7/16	15.24	12.70	17.78	15.24	24.63	38.60
SRU 4 - 3	1/4	3/16	3.04	1/2	9/16	1/2	15.24	13.71	17.78	16.00	25.40	39.37
SRU 5 - 2	5/16	1/8	2.28	9/16	5/8	7/16	16.25	12.70	18.54	15.24	25.90	39.87
SRU 5 - 4	5/16	1/4	4.82	9/16	5/8	9/16	16.25	15.24	18.54	17.78	27.43	42.16
SRU 6 - 2	3/8	1/8	2.28	5/8	11/16	7/16	16.76	12.70	19.30	15.24	26.92	40.89
SRU 6 - 4	3/8	1/4	4.82	5/8	11/16	9/16	16.76	15.24	19.30	17.78	28.44	43.18
SRU 6 - 5	3/8	5/16	6.35	5/8	11/16	5/8	16.76	16.25	19.30	18.54	29.46	44.19
SRU 8 - 2	1/2	1/8	2.28	13/16	7/8	7/16	22.86	12.70	21.84	15.24	28.44	45.21
SRU 8 - 4	1/2	1/4	4.82	13/16	7/8	9/16	22.86	15.24	21.84	17.78	29.46	46.99
SRU 8 - 6	1/2	3/8	7.11	13/16	7/8	11/16	22.86	16.76	21.84	19.30	30.98	48.51
SRU 10 - 6	5/8	3/8	7.11	15/16	1	11/16	24.38	16.76	21.84	19.30	31.75	49.27
SRU 10 - 8	5/8	1/2	10.41	15/16	1	7/8	24.38	22.86	21.84	21.84	31.75	52.07
SRU 12 - 4	3/4	1/4	4.82	1-1/16	1-1/8	9/16	24.38	15.24	21.84	17.78	31.75	49.27
SRU 12 - 6	3/4	3/8	7.11	1-1/16	1-1/8	11/16	24.38	16.76	21.84	19.30	33.27	50.80
SRU 12 - 8	3/4	1/2	10.41	1-1/16	1-1/8	7/8	24.38	22.86	21.84	21.84	33.27	53.59
SRU 12 - 10	3/4	5/8	12.70	1-1/16	1-1/8	1	24.38	24.38	21.84	21.84	33.27	53.59
SRU 16 - 8	1	1/2	10.41	1-3/8	1-1/2	7/8	31.24	22.86	26.41	21.84	39.50	63.24
SRU 16 - 12	1	3/4	15.74	1-3/8	1-1/2	1-1/8	31.24	24.38	26.41	21.84	39.00	62.73

Connects Metric Tubes

Part No.	Tube O.D.		d Min	Width Across Flat			A	A ₁	B	B ₁	I	L
	D	D ₁		h	H	H ₁						
SRU 6M- 3M	6	3	2.4	14	14	12	15.3	12.9	17.7	15.3	24.6	38.6
SRU 6M- 4M	6	4	2.4	14	14	12	15.3	13.7	17.7	16.1	25.4	39.4
SRU 8M- 6M	8	6	4.8	15	16	14	16.2	15.3	18.6	17.7	27.4	42.3
SRU 10M- 6M	10	6	4.8	18	19	14	17.2	15.3	19.5	17.7	29.5	44.5
SRU 10M- 8M	10	8	6.4	18	19	16	17.2	16.2	19.5	18.6	30.0	45.1
SRU 12M- 6M	12	6	4.8	22	22	14	22.8	15.3	22.0	17.7	29.5	47.0
SRU 12M- 8M	12	8	6.4	22	22	16	22.8	16.2	22.0	18.6	30.2	47.8
SRU 12M- 10M	12	10	7.9	22	22	19	22.8	17.2	22.0	19.5	31.0	48.7
SRU 16M- 12M	16	12	9.5	24	25	22	24.4	22.8	22.0	22.0	31.8	52.0
SRU 25M- 18M	25	18	15.1	35	38	30	31.3	24.4	26.5	22.0	38.6	61.0
SRU 25M- 20M	25	20	15.9	35	38	32	31.3	26.0	26.5	22.0	39.9	62.3

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SRU Reducing Union



Connects Metric Tubes To Fractional Tubes

Part No.	Tube O.D.		d Min	Width Across Flat			A	A ₁	B	B ₁	I	L
	D	D ₁ (inch)		h	H	H ₁						
SRU 3M - 2	3	1/8	2.4	12	12	11.1	12.9	12.8	15.3	15.2	22.1	35.2
SRU 4M - 2	4	1/8	2.4	12	12	11.1	13.7	12.8	16.1	15.2	23.4	36.5
SRU 4M - 4	4	1/4	2.4	14	12	14.3	13.7	15.3	16.1	17.7	25.4	39.4
SRU 6M - 2	6	1/8	2.4	14	14	11.1	15.3	12.8	17.7	15.2	24.6	38.5
SRU 6M - 4	6	1/4	4.8	14	14	14.3	15.3	15.3	17.7	17.7	26.2	41.0
SRU 6M - 5	6	5/16	4.8	14	14	15.9	15.3	16.2	17.7	18.6	27.4	42.3
SRU 8M - 4	8	1/4	4.8	15	16	14.3	16.2	15.3	18.6	17.7	27.4	42.3
SRU 10M - 2	10	1/8	2.4	18	19	11.1	17.2	12.8	19.5	15.2	27.7	41.8
SRU 10M - 4	10	1/4	4.8	18	19	14.3	17.2	15.3	19.5	17.7	29.5	44.5
SRU 10M - 5	10	5/16	6.4	18	19	15.9	17.2	16.2	19.5	18.6	30.0	45.1
SRU 10M - 6	10	3/8	7.1	18	19	17.5	17.2	16.9	19.5	19.2	31.0	45.9
SRU 12M - 5	12	5/16	6.4	22	22	15.9	22.8	16.2	22.0	18.6	30.2	47.8
SRU 12M - 6	12	3/8	7.1	22	22	17.5	22.8	16.9	22.0	19.2	31.0	48.4
SRU 12M - 8	12	1/2	9.5	22	22	22.2	22.8	22.8	22.0	22.0	31.0	51.2
SRU 15M - 8	15	1/2	10.3	24	25	22.2	24.4	22.8	22.0	22.0	31.8	52.0
SRU 16M - 10	16	5/8	12.7	24	25	25.4	24.4	24.4	22.0	22.0	31.8	52.0
SRU 18M - 12	18	3/4	15.1	27	30	28.6	24.4	24.4	22.0	22.0	33.3	53.5
SRU 20M - 12	20	3/4	15.9	30	32	28.6	26.0	24.4	22.0	22.0	34.8	54.9
SRU 20M - 16	20	1	15.9	35	32	38.1	26.0	31.2	22.0	26.4	40.4	62.8
SRU 25M - 16	25	1	21.8	35	38	38.1	31.3	31.3	26.5	26.5	40.4	65.0

SBHRU Bulkhead Reducing Union




Connects Fractional Tubes

Part No.	Tube O.D.		d Min	Width Across Flat			A	A ₁	I	I ₁	L	L ₁	L ₂	Panel Hole Drill Size	Panel Max. Thickness
	D (inch)	D ₁ (inch)		h (inch)	H (inch)	H ₁ (inch)									
SBHRU 4 - 2	1/4	1/8	2.28	5/8	9/16	7/16	15.24	12.70	41.14	26.16	55.11	33.52	15.24	11.50	10.16
SBHRU 6 - 4	3/8	1/4	4.82	3/4	11/16	9/16	16.76	15.24	45.97	29.46	60.70	36.57	17.78	14.68	11.17
SBHRU 8 - 4	1/2	1/4	4.82	15/16	7/8	9/16	22.86	15.24	49.27	31.75	66.80	41.91	17.78	19.44	12.70

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SBHU Bulkhead Union



Connects Fractional Tubes


Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	B	I	I ₁	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
			h (inch)	H (inch)								
SBHU - 1	1/16	1.27	5/16	5/16	8.63	10.92	23.87	13.46	31.50	17.27	5.16	3.05
SBHU - 2	1/8	2.28	1/2	7/16	12.70	15.24	38.10	24.63	51.30	31.24	8.33	12.70
SBHU - 3	3/16	3.04	9/16	1/2	13.71	16.00	40.38	25.40	53.59	32.00	9.92	12.70
SBHU - 4	1/4	4.82	5/8	9/16	15.24	17.78	42.92	26.16	57.65	33.52	11.50	10.16
SBHU - 5	5/16	6.35	11/16	5/8	16.25	18.54	45.97	28.44	60.70	35.81	13.09	11.17
SBHU - 6	3/8	7.11	3/4	11/16	16.76	19.30	47.49	29.46	62.23	36.83	14.68	11.17
SBHU - 8	1/2	10.41	15/16	7/8	22.86	21.84	50.80	31.75	71.12	41.91	19.44	12.70
SBHU - 10	5/8	12.70	1-1/16	1	24.38	21.84	52.32	32.51	72.64	42.67	22.62	12.70
SBHU - 12	3/4	15.74	1-3/16	1-1/8	24.38	21.84	58.67	37.33	78.99	47.49	25.79	16.76
SBHU - 14	7/8	18.28	1-3/8	1-1/4	25.90	21.84	64.26	42.92	84.58	53.08	28.97	19.05
SBHU - 16	1	22.35	1-5/8	1-1/2	31.24	26.41	71.37	45.21	95.75	57.40	33.73	19.05

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	Width Across Flat			A	B	I	I ₁	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
			h	h ₁ *	H								
SBHU - 3M	3	2.4	14	12.7	12	12.9	15.3	38.1	24.6	51.3	31.2	8.3	12.7
SBHU - 4M	4	2.4	14	14.3	12	13.7	16.1	40.4	25.4	53.6	32.0	9.9	12.7
SBHU - 6M	6	4.8	16	15.9	14	15.3	17.7	42.9	26.2	57.7	33.6	11.5	10.2
SBHU - 8M	8	6.4	18	17.5	16	16.2	18.6	46.0	28.6	61.0	36.1	13.1	11.2
SBHU - 10M	10	7.9	22	22.0	19	17.2	19.5	48.5	29.4	63.7	37.0	16.2	11.2
SBHU - 12M	12	9.5	24	23.8	22	22.8	22.0	50.8	31.8	71.0	41.9	19.5	12.7
SBHU - 15M	15	11.9	27	27.0	25	24.4	22.0	52.3	32.5	72.5	42.6	22.8	12.7
SBHU - 16M	16	12.7	27	27.0	25	24.4	22.0	52.3	32.5	72.5	42.6	22.8	12.7
SBHU - 18M	18	15.1	30	30.0	30	24.4	22.0	58.7	37.3	78.9	47.4	26.0	16.8
SBHU - 20M	20	15.9	35	35.0	32	26.0	22.0	64.3	42.9	84.5	53.0	29.0	17.0
SBHU - 22M	22	18.3	35	35.0	32	26.0	22.0	64.3	42.9	84.5	53.0	29.0	19.1
SBHU - 25M	25	21.8	41.3	41.3	38	31.3	26.5	71.4	45.2	95.9	57.5	33.7	19.1

h1* : Metric Tubes Bulkhead Hexagon application only

SMC Male Connector




Connects Fractional Tubes To Female NPT Thread

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SMC 1 - 1N	1/16	1/16	1.27	5/16	5/16	8.63	10.92	20.00	23.83
SMC 1 - 2N	1/16	1/8	1.27	7/16	7/16	8.63	10.92	22.35	26.23
SMC 2 - 2N	1/8	1/8	2.28	7/16	7/16	12.70	15.24	23.87	30.48
SMC 2 - 4N	1/8	1/4	2.28	9/16	7/16	12.70	15.24	28.95	35.56
SMC 2 - 6N	1/8	3/8	2.28	11/16	7/16	12.70	15.24	29.21	35.81
SMC 2 - 8N	1/8	1/2	2.28	7/8	7/16	12.70	15.24	35.56	42.16
SMC 3 - 2N	3/16	1/8	3.04	7/16	1/2	13.71	16.00	24.63	31.24
SMC 3 - 4N	3/16	1/4	3.04	9/16	1/2	13.71	16.00	29.71	36.32
SMC 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	25.40	32.76
SMC 4 - 4N	1/4	1/4	4.82	9/16	9/16	15.24	17.78	30.48	37.84
SMC 4 - 6N	1/4	3/8	4.82	11/16	9/16	15.24	17.78	30.98	38.35
SMC 4 - 8N	1/4	1/2	4.82	7/8	9/16	15.24	17.78	37.33	44.70
SMC 4 - 12N	1/4	3/4	4.82	1-1/16	9/16	15.24	17.78	38.86	46.22
SMC 5 - 2N	5/16	1/8	4.82	9/16	5/8	16.25	18.54	26.67	34.03
SMC 5 - 4N	5/16	1/4	6.35	9/16	5/8	16.25	18.54	31.24	38.60
SMC 5 - 6N	5/16	3/8	6.35	11/16	5/8	16.25	18.54	31.75	39.11
SMC 6 - 2N	3/8	1/8	4.82	5/8	11/16	16.76	19.30	27.94	35.30
SMC 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	32.51	39.87
SMC 6 - 6N	3/8	3/8	7.11	11/16	11/16	16.76	19.30	32.51	39.87
SMC 6 - 8N	3/8	1/2	7.11	7/8	11/16	16.76	19.30	38.86	46.22
SMC 6 - 12N	3/8	3/4	7.11	1-1/16	11/16	16.76	19.30	40.38	47.75
SMC 8 - 2N	1/2	1/8	4.82	13/16	7/8	22.86	21.84	28.70	38.86
SMC 8 - 4N	1/2	1/4	7.11	13/16	7/8	22.86	21.84	33.27	43.43
SMC 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	33.27	43.43
SMC 8 - 8N	1/2	1/2	10.41	7/8	7/8	22.86	21.84	38.86	49.02
SMC 8 - 12N	1/2	3/4	10.41	1-1/16	7/8	22.86	21.84	40.38	50.54
SMC 8 - 16N	1/2	1	10.41	1-3/8	7/8	22.86	21.84	46.99	57.15
SMC 10 - 6N	5/8	3/8	9.65	15/16	1	24.38	21.84	34.03	44.19
SMC 10 - 8N	5/8	1/2	11.93	15/16	1	24.38	21.84	38.86	49.02
SMC 10 - 12N	5/8	3/4	12.70	1-1/16	1	24.38	21.84	40.38	50.54
SMC 12 - 8N	3/4	1/2	11.93	1-1/16	1-1/8	24.38	21.84	40.38	50.54
SMC 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	40.38	50.54
SMC 12 - 16N	3/4	1	15.74	1-3/8	1-1/8	24.38	21.84	46.99	57.15
SMC 14 - 12N	7/8	3/4	15.74	1-3/16	1-1/4	25.90	21.84	40.38	50.54
SMC 14 - 16N	7/8	1	18.28	1-3/8	1-1/4	25.90	21.84	46.99	57.15
SMC 16 - 8N	1	1/2	11.93	1-3/8	1-1/2	31.24	26.41	45.21	57.40
SMC 16 - 12N	1	3/4	15.74	1-3/8	1-1/2	31.24	26.41	45.21	57.40
SMC 16 - 16N	1	1	22.35	1-3/8	1-1/2	31.24	26.41	50.03	62.23
SMC 20 - 16N	1-1/4	1	22.35	1-3/4	1-7/8	41.15	38.86	55.12	77.22
SMC 20 - 20N	1-1/4	1-1/4	27.69	1-3/4	1-7/8	41.15	38.86	55.12	77.22
SMC 24 - 24N	1-1/2	1-1/2	34.04	2-1/8	2-1/4	50.04	45.21	61.72	88.90
SMC 32 - 32N	2	2	45.97	2-3/4	3	67.56	62.74	76.20	113.54

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SMC Male Connector




Connects Fractional Tube To Female ISO Tapered Thread

Part No.	Tube O.D. D (inch)	T R (PT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SMC 2 - 2R	1/8	1/8	2.28	7/16	7/16	12.70	15.24	23.87	30.48
SMC 2 - 4R	1/8	1/4	2.28	9/16	7/16	12.70	15.24	28.95	35.56
SMC 4 - 2R	1/4	1/8	4.82	1/2	9/16	15.24	17.78	25.40	32.76
SMC 4 - 4R	1/4	1/4	4.82	9/16	9/16	15.24	17.78	30.48	37.84
SMC 4 - 6R	1/4	3/8	4.82	11/16	9/16	15.24	17.78	30.98	38.35
SMC 4 - 8R	1/4	1/2	4.82	7/8	9/16	15.24	17.78	37.33	44.70
SMC 5 - 2R	5/16	1/8	4.82	9/16	5/8	16.25	18.54	26.67	34.03
SMC 5 - 4R	5/16	1/4	6.35	9/16	5/8	16.25	18.54	31.24	38.60
SMC 6 - 2R	3/8	1/8	4.82	5/8	11/16	16.76	19.30	27.94	35.30
SMC 6 - 4R	3/8	1/4	7.11	5/8	11/16	16.76	19.30	32.51	39.87
SMC 6 - 6R	3/8	3/8	7.11	11/16	11/16	16.76	19.30	32.51	39.87
SMC 6 - 8R	3/8	1/2	7.11	7/8	11/16	16.76	19.30	38.86	46.22
SMC 8 - 4R	1/2	1/4	7.11	13/16	7/8	22.86	21.84	33.27	43.43
SMC 8 - 6R	1/2	3/8	9.65	13/16	7/8	22.86	21.84	33.27	43.43
SMC 8 - 8R	1/2	1/2	10.41	7/8	7/8	22.86	21.84	38.86	49.02
SMC 8 - 12R	1/2	3/4	10.41	1-1/16	7/8	22.86	21.84	40.38	50.54
SMC 12 - 12R	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	40.38	50.54
SMC 16 - 16R	1	1	22.35	1-3/8	1-1/2	31.24	26.41	50.03	62.23


Bored - Through Fittings for Thermocouples

SUPERLOK Bored-Through MALE CONNECTORS accommodate thermocouples or dip tubes. To order, use TM as a suffix to the desired Male Connector ordering number.

Note - The root diameter of the pipe thread end of male connectors makes it impractical to bore through all male connectors.

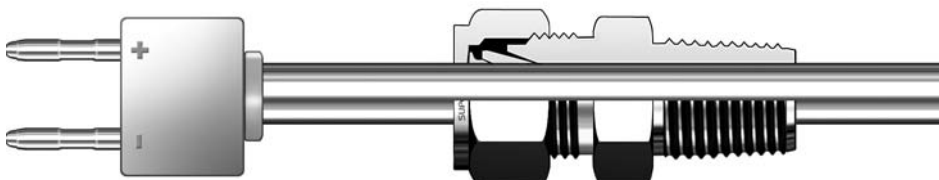

SMC Male Connector




Connects Metric Tube To Female NPT Thread

Part No.	Tube O.D. D	T (NPT)	d Min	Width Across Flat		A	B	I	L
				h	H				
SMC 2M - 2N	2	1/8	1.7	12	12	12.9	15.3	23.9	30.5
SMC 3M - 2N	3	1/8	2.4	12	12	12.9	15.3	23.9	30.5
SMC 3M - 4N	3	1/4	2.4	14	12	12.9	15.3	29.0	35.6
SMC 4M - 2N	4	1/8	2.4	12	12	13.7	16.1	24.6	31.2
SMC 4M - 4N	4	1/4	2.4	14	12	13.7	16.1	29.7	36.3
SMC 6M - 2N	6	1/8	4.8	14	14	15.3	17.7	25.4	32.8
SMC 6M - 4N	6	1/4	4.8	14	14	15.3	17.7	30.5	37.9
SMC 6M - 6N	6	3/8	4.8	18	14	15.3	17.7	31.0	38.4
SMC 6M - 8N	6	1/2	4.8	22	14	15.3	17.7	37.3	44.7
SMC 8M - 2N	8	1/8	4.8	15	16	16.2	18.6	26.7	34.2
SMC 8M - 4N	8	1/4	6.4	15	16	16.2	18.6	31.2	38.7
SMC 8M - 6N	8	3/8	6.4	18	16	16.2	18.6	31.8	39.3
SMC 8M - 8N	8	1/2	6.4	22	16	16.2	18.6	38.1	45.6
SMC 10M - 2N	10	1/8	4.8	18	19	17.2	19.5	28.7	36.3
SMC 10M - 4N	10	1/4	7.9	18	19	17.2	19.5	33.3	40.9
SMC 10M - 6N	10	3/8	7.9	18	19	17.2	19.5	33.3	40.9
SMC 10M - 8N	10	1/2	7.9	22	19	17.2	19.5	38.9	46.5
SMC 12M - 2N	12	1/8	4.8	22	22	22.8	22.0	28.7	38.8
SMC 12M - 4N	12	1/4	7.1	22	22	22.8	22.0	33.3	43.4
SMC 12M - 6N	12	3/8	9.5	22	22	22.8	22.0	33.3	43.4
SMC 12M - 8N	12	1/2	9.5	22	22	22.8	22.0	38.9	49.0
SMC 12M - 12N	12	3/4	9.5	27	22	22.8	22.0	40.4	50.5
SMC 14M - 4N	14	1/4	7.1	24	25	24.4	22.0	34.0	44.1
SMC 14M - 6N	14	3/8	9.5	24	25	24.4	22.0	34.0	44.1
SMC 14M - 8N	14	1/2	11.1	24	25	24.4	22.0	38.9	49.0
SMC 16M - 6N	16	3/8	9.5	24	25	24.4	22.0	34.0	44.1
SMC 16M - 8N	16	1/2	11.9	24	25	24.4	22.0	38.9	49.0
SMC 16M - 12N	16	3/4	12.7	27	25	24.4	22.0	40.4	50.5
SMC 18M - 8N	18	1/2	11.9	27	30	24.4	22.0	40.4	50.5
SMC 18M - 12N	18	3/4	15.1	27	30	24.4	22.0	40.4	50.5
SMC 20M - 8N	20	1/2	11.9	30	32	26.0	22.0	42.2	52.3
SMC 20M - 12N	20	3/4	15.9	30	32	26.0	22.0	42.2	52.3
SMC 22M - 12N	22	3/4	15.9	30	32	26.0	22.0	42.2	52.3
SMC 22M - 16N	22	1	18.3	35	32	26.0	22.0	47.0	57.1
SMC 25M - 12N	25	3/4	15.9	35	38	31.3	26.5	45.2	57.5
SMC 25M - 16N	25	1	21.8	35	38	31.3	26.5	50.0	62.3
SMC 28M - 16N	28	1	21.8	41	46	36.6	36.6	51.6	72.4
SMC 28M - 20N	28	1-1/4	21.8	46	46	36.6	36.6	52.3	73.1
SMC 30M - 20N	30	1-1/4	26.2	46	50	39.6	39.2	55.6	77.2
SMC 32M - 20N	32	1-1/4	28.6	46	50	42.0	41.6	56.6	79.6
SMC 38M - 24N	38	1-1/2	33.7	55	60	49.4	47.9	64.0	91.6

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SMC Male Connector




Connects Metric Tube To Female ISO Tapered Thread

Part No.	Tube O.D. D	T R (PT)	d Min	Width Across Flat		A	B	I	L
				h	H				
SMC 2M - 2R	2	1/8	1.7	12	12	12.9	15.3	23.9	30.5
SMC 3M - 2R	3	1/8	2.4	12	12	12.9	15.3	23.9	30.5
SMC 3M - 4R	3	1/4	2.4	14	12	12.9	15.3	29.0	35.6
SMC 4M - 2R	4	1/8	2.4	12	12	13.7	16.1	24.6	31.2
SMC 4M - 4R	4	1/4	2.4	14	12	13.7	16.1	29.7	36.3
SMC 6M - 2R	6	1/8	4.8	14	14	15.3	17.7	25.4	32.8
SMC 6M - 4R	6	1/4	4.8	14	14	15.3	17.7	30.5	37.9
SMC 6M - 6R	6	3/8	4.8	18	14	15.3	17.7	31.0	38.4
SMC 6M - 8R	6	1/2	4.8	22	14	15.3	17.7	37.3	44.7
SMC 8M - 2R	8	1/8	4.8	15	16	16.2	18.6	26.7	34.2
SMC 8M - 4R	8	1/4	6.4	15	16	16.2	18.6	31.2	38.7
SMC 8M - 6R	8	3/8	6.4	18	16	16.2	18.6	31.8	39.3
SMC 8M - 8R	8	1/2	6.4	22	16	16.2	18.6	38.1	45.6
SMC 10M - 2R	10	1/8	4.8	18	19	17.2	19.5	28.7	36.3
SMC 10M - 4R	10	1/4	7.9	18	19	17.2	19.5	33.3	40.9
SMC 10M - 6R	10	3/8	7.9	18	19	17.2	19.5	33.3	40.9
SMC 10M - 8R	10	1/2	7.9	22	19	17.2	19.5	38.9	46.5
SMC 12M - 4R	12	1/4	7.1	22	22	22.8	22.0	33.3	43.4
SMC 12M - 6R	12	3/8	9.5	22	22	22.8	22.0	33.3	43.4
SMC 12M - 8R	12	1/2	9.5	22	22	22.8	22.0	38.9	49.0
SMC 12M - 12R	12	3/4	9.5	27	22	22.8	22.0	40.4	50.5
SMC 15M - 8R	15	1/2	11.9	24	25	24.4	22.0	38.9	49.0
SMC 16M - 4R	16	1/4	7.1	24	25	24.4	22.0	34.0	44.1
SMC 16M - 6R	16	3/8	9.5	24	25	24.4	22.0	34.0	44.1
SMC 16M - 8R	16	1/2	11.9	24	25	24.4	22.0	38.9	49.0
SMC 16M - 12R	16	3/4	12.7	27	25	24.4	22.0	40.4	50.5
SMC 18M - 8R	18	1/2	11.9	27	30	24.4	22.0	40.4	50.5
SMC 18M - 12R	18	3/4	15.1	27	30	24.4	22.0	40.4	50.5
SMC 20M - 8R	20	1/2	11.9	30	32	26.0	22.0	42.2	52.3
SMC 20M - 12R	20	3/4	15.9	30	32	26.0	22.0	42.2	52.3
SMC 22M - 12R	22	3/4	15.9	30	32	26.0	22.0	42.2	52.3
SMC 22M - 16R	22	1	18.3	35	32	26.0	22.0	47.0	57.1
SMC 25M - 12R	25	3/4	15.9	35	38	31.3	26.5	45.2	57.5
SMC 25M - 16R	25	1	21.8	35	38	31.3	26.5	50.0	62.3
SMC 28M - 16R	28	1	21.8	41	46	36.6	36.6	51.6	72.4
SMC 28M - 20R	28	1-1/4	21.8	46	46	36.6	36.6	52.3	73.1
SMC 30M - 20R	30	1-1/4	26.2	46	50	39.6	39.2	55.6	77.2
SMC 32M - 20R	32	1-1/4	28.6	46	50	42.0	41.6	56.6	79.6
SMC 38M - 24R	38	1-1/2	33.7	55	60	49.4	47.9	64.0	91.6

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SGMC

Male Connector For Bonded Washer Seal




Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D	T G (PF)	d Min	Width Across Flat		A	B	I	L ₁	L	K
				h	H						
SGMC 3M - 2G	3	1/8	2.4	14	12	12.9	15.3	23.4	7.1	30.0	13.8
SGMC 3M - 4G	3	1/4	2.4	19	12	12.9	15.3	28.7	11.2	35.3	18.0
SGMC 4M - 2G	4	1/8	2.4	14	12	13.7	16.1	24.1	7.1	30.7	13.8
SGMC 6M - 2G	6	1/8	4.0	14	14	15.3	17.7	24.9	7.1	32.3	13.8
SGMC 6M - 4G	6	1/4	4.8	19	14	15.3	17.7	30.2	11.2	37.6	18.0
SGMC 6M - 6G	6	3/8	4.8	22	14	15.3	17.7	31.5	11.2	38.9	21.8
SGMC 6M - 8G	6	1/2	4.8	27	14	15.3	17.7	37.3	14.2	44.7	26.0
SGMC 8M - 2G	8	1/8	4.0	15	16	16.2	18.6	25.7	7.1	33.2	13.8
SGMC 8M - 4G	8	1/4	6.4	19	16	16.2	18.6	31.0	11.2	38.5	18.0
SGMC 8M - 6G	8	3/8	6.4	22	16	16.2	18.6	32.3	11.2	39.8	21.8
SGMC 8M - 8G	8	1/2	6.4	27	16	16.2	18.6	38.1	14.2	45.6	26.0
SGMC 10M - 4G	10	1/4	5.9	19	19	17.2	19.5	31.8	11.2	39.4	18.0
SGMC 10M - 6G	10	3/8	7.9	22	19	17.2	19.5	33.0	11.2	40.6	21.8
SGMC 10M - 8G	10	1/2	7.9	27	19	17.2	19.5	38.9	14.2	46.5	26.0
SGMC 12M - 4G	12	1/4	5.9	22	22	22.8	22.0	32.5	11.2	42.6	18.0
SGMC 12M - 6G	12	3/8	7.9	22	22	22.8	22.0	33.0	11.2	43.1	21.8
SGMC 12M - 8G	12	1/2	9.5	27	22	22.8	22.0	38.9	14.2	49.0	26.0
SGMC 12M - 12G	12	3/4	9.5	35	22	22.8	22.0	42.7	15.7	52.8	32.0
SGMC 16M - 6G	16	3/8	7.9	24	25	24.4	22.0	33.8	11.2	43.9	21.8
SGMC 16M - 8G	16	1/2	11.9	27	25	24.4	22.0	38.9	14.2	49.0	26.0
SGMC 18M - 8G	18	1/2	11.9	27	30	24.4	22.0	38.9	14.2	49.0	26.0
SGMC 18M - 12G	18	3/4	15.1	35	30	24.4	22.0	42.7	15.7	52.8	32.0
SGMC 20M - 8G	20	1/2	11.9	30	32	26.0	22.0	40.4	14.2	50.5	26.0
SGMC 20M - 12G	20	3/4	15.9	35	32	26.0	22.0	42.7	15.7	52.8	32.0
SGMC 22M - 12G	22	3/4	15.9	35	32	26.0	22.0	42.7	15.7	52.8	32.0
SGMC 22M - 16G	22	1	18.3	41	32	26.0	22.0	45.2	18.3	55.3	39.0
SGMC 25M - 12G	25	3/4	15.9	35	38	31.3	26.5	45.2	15.7	57.5	32.0
SGMC 25M - 16G	25	1	19.8	41	38	31.3	26.5	47.8	18.3	60.1	39.0

* See page 10 for Explanation of ISO Pipe Thread.

SOMC

Male Connector For Metal Gasket Seal




Connects Metric Tube To Female ISO Parallel Thread

Part No.	Tube O.D. D	T G (PF)	d Min	Width Across Flat		A	B	I	I ₁	L	K
				h	H						
SOMC 3M - 2G	3	1/8	2.4	14	12	12.9	15.3	23.4	7.1	30.0	13.8
SOMC 3M - 4G	3	1/4	2.4	19	12	12.9	15.3	28.7	11.2	35.3	18.0
SOMC 4M - 2G	4	1/8	2.4	14	12	13.7	16.1	24.1	7.1	30.7	13.8
SOMC 6M - 2G	6	1/8	4.0	14	14	15.3	17.7	24.9	7.1	32.3	13.8
SOMC 6M - 4G	6	1/4	4.8	19	14	15.3	17.7	30.2	11.2	37.6	18.0
SOMC 6M - 6G	6	3/8	4.8	22	14	15.3	17.7	31.5	11.2	38.9	21.8
SOMC 6M - 8G	6	1/2	4.8	27	14	15.3	17.7	37.3	14.2	44.7	26.0
SOMC 8M - 2G	8	1/8	4.0	15	16	16.2	18.6	25.7	7.1	33.2	13.8
SOMC 8M - 4G	8	1/4	6.4	19	16	16.2	18.6	31.0	11.2	38.5	18.0
SOMC 8M - 6G	8	3/8	6.4	22	16	16.2	18.6	32.3	11.2	39.8	21.8
SOMC 8M - 8G	8	1/2	6.4	27	16	16.2	18.6	38.1	14.2	45.6	26.0
SOMC 10M - 4G	10	1/4	5.9	19	19	17.2	19.5	31.8	11.2	39.4	18.0
SOMC 10M - 6G	10	3/8	7.9	22	19	17.2	19.5	33.0	11.2	40.6	21.8
SOMC 10M - 8G	10	1/2	7.9	27	19	17.2	19.5	38.9	14.2	46.5	26.0
SOMC 12M - 4G	12	1/4	5.9	22	22	22.8	22.0	32.5	11.2	42.6	18.0
SOMC 12M - 6G	12	3/8	7.9	22	22	22.8	22.0	33.0	11.2	43.1	21.8
SOMC 12M - 8G	12	1/2	9.5	27	22	22.8	22.0	38.9	14.2	49.0	26.0
SOMC 12M - 12G	12	3/4	9.5	35	22	22.8	22.0	42.7	15.7	52.8	32.0
SOMC 15M - 8G	15	1/2	11.9	27	25	24.4	22.0	38.9	14.2	49.0	26.0
SOMC 16M - 6G	16	3/8	7.9	24	25	24.4	22.0	33.8	11.2	43.9	21.8
SOMC 16M - 8G	16	1/2	11.9	27	25	24.4	22.0	38.9	14.2	49.0	26.0
SOMC 18M - 8G	18	1/2	11.9	27	30	24.4	22.0	38.9	14.2	49.0	26.0
SOMC 18M - 12G	18	3/4	15.1	35	30	24.4	22.0	42.7	15.7	52.8	32.0
SOMC 20M - 8G	20	1/2	11.9	30	32	26.0	22.0	40.4	14.2	50.5	26.0
SOMC 20M - 12G	20	3/4	15.9	35	32	26.0	22.0	42.7	15.7	52.8	32.0
SOMC 22M - 12G	22	3/4	15.9	35	32	26.0	22.0	42.7	15.7	52.8	32.0
SOMC 22M - 16G	22	1	18.3	41	32	26.0	22.0	45.2	18.3	55.3	39.0
SOMC 25M - 12G	25	3/4	15.9	35	38	31.3	26.5	45.2	15.7	57.5	32.0
SOMC 25M - 16G	25	1	19.8	41	38	31.3	26.5	47.8	18.3	60.1	39.0

* See page 10 for Explanation of ISO Pipe Thread.

SFC Female Connector




Connects Fractional Tubes To Male NPT Thread

Part No.	Tube O.D. D (inch)	T * (NPT)	d Min	Width Across Flat		A	B	I	L
				h (inch)	H (inch)				
SFC 2 - 2N	1/8	1/8	2.28	9/16	7/16	12.70	15.24	22.09	28.70
SFC 2 - 4N	1/8	1/4	2.28	3/4	7/16	12.70	15.24	26.92	33.52
SFC 3 - 2N	3/16	1/8	3.04	9/16	1/2	13.71	16.00	23.11	29.71
SFC 4 - 2N	1/4	1/8	4.82	9/16	9/16	15.24	17.78	23.87	31.24
SFC 4 - 4N	1/4	1/4	4.82	3/4	9/16	15.24	17.78	28.44	35.81
SFC 4 - 6N	1/4	3/8	4.82	7/8	9/16	15.24	17.78	30.22	37.59
SFC 4 - 8N	1/4	1/2	4.82	1-1/16	9/16	15.24	17.78	35.05	42.41
SFC 5 - 2N	5/16	1/8	6.35	9/16	5/8	16.25	18.54	24.63	32.00
SFC 5 - 4N	5/16	1/4	6.35	3/4	5/8	16.25	18.54	29.46	36.83
SFC 6 - 2N	3/8	1/8	7.11	5/8	11/16	16.76	19.30	25.40	32.76
SFC 6 - 4N	3/8	1/4	7.11	3/4	11/16	16.76	19.30	30.22	37.59
SFC 6 - 6N	3/8	3/8	7.11	7/8	11/16	16.76	19.30	31.75	39.11
SFC 6 - 8N	3/8	1/2	7.11	1-1/16	11/16	16.76	19.30	36.57	43.94
SFC 6 - 12N	3/8	3/4	7.11	1-5/16	11/16	16.76	19.30	40.38	47.75
SFC 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	30.22	40.38
SFC 8 - 6N	1/2	3/8	10.41	7/8	7/8	22.86	21.84	31.75	41.91
SFC 8 - 8N	1/2	1/2	10.41	1-1/16	7/8	22.86	21.84	36.57	46.73
SFC 8 - 12N	1/2	3/4	10.41	1-5/16	7/8	22.86	21.84	38.10	48.26
SFC 10 - 6N	5/8	3/8	12.70	15/16	1	24.38	21.84	31.75	41.91
SFC 10 - 8N	5/8	1/2	12.70	1-1/16	1	24.38	21.84	36.57	46.73
SFC 12 - 8N	3/4	1/2	15.74	1-1/16	1-1/8	24.38	21.84	36.57	46.73
SFC 12 - 12N	3/4	3/4	15.74	1-5/16	1-1/8	24.38	21.84	38.10	48.26
SFC 14 - 12N	7/8	3/4	18.28	1-5/16	1-1/4	25.90	21.84	39.62	49.78
SFC 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	41.14	53.34
SFC 16 - 16N	1	1	22.35	1-5/8	1-1/2	31.24	26.41	50.03	62.23

* ISO Tapered Threads are available upon request

SFC Female Connector




Connects Metric Tubes To Male ISO Tapered Thread

Part No.	Tube O.D. D	T * R (PT)	d Min	Width Across Flat		A	B	I	L
				h	H				
SFC 3M - 2R	3	1/8	2.4	14	12	12.9	15.3	22.1	28.7
SFC 3M - 4R	3	1/4	2.4	19	12	12.9	15.3	26.9	33.5
SFC 4M - 2R	4	1/8	2.4	14	12	13.7	16.1	23.1	29.7
SFC 6M - 2R	6	1/8	4.8	14	14	15.3	17.7	23.9	31.3
SFC 6M - 4R	6	1/4	4.8	19	14	15.3	17.7	28.4	35.8
SFC 6M - 6R	6	3/8	4.8	22	14	15.3	17.7	30.2	37.6
SFC 6M - 8R	6	1/2	4.8	27	14	15.3	17.7	35.1	42.5
SFC 8M - 2R	8	1/8	6.4	15	16	16.2	18.6	24.6	32.1
SFC 8M - 4R	8	1/4	6.4	19	16	16.2	18.6	29.5	37.0
SFC 8M - 6R	8	3/8	6.4	22	16	16.2	18.6	31.0	38.5
SFC 8M - 8R	8	1/2	6.4	27	16	16.2	18.6	35.8	43.3
SFC 10M - 2R	10	1/8	7.9	18	19	17.2	19.5	25.4	33.0
SFC 10M - 4R	10	1/4	7.9	19	19	17.2	19.5	30.2	37.8
SFC 10M - 6R	10	3/8	7.9	22	19	17.2	19.5	31.8	39.4
SFC 10M - 8R	10	1/2	7.9	27	19	17.2	19.5	36.6	44.2
SFC 12M - 2R	12	1/8	8.3	22	22	22.8	22.0	25.4	35.5
SFC 12M - 4R	12	1/4	9.5	22	22	22.8	22.0	30.2	40.3
SFC 12M - 6R	12	3/8	9.5	22	22	22.8	22.0	31.8	41.9
SFC 12M - 8R	12	1/2	9.5	27	22	22.8	22.0	36.6	46.7
SFC 12M - 12R	12	3/4	9.5	35	22	22.8	22.0	38.9	49.0
SFC 15M - 8R	15	1/2	11.9	27	25	24.4	22.0	36.6	46.7
SFC 16M - 8R	16	1/2	12.7	27	25	24.4	22.0	36.8	46.9
SFC 20M - 8R	20	1/2	15.9	30	32	26.0	22.0	37.8	47.9
SFC 20M - 12R	20	3/4	15.9	35	32	26.0	22.0	39.6	49.7
SFC 22M - 12R	22	3/4	18.3	35	32	26.0	22.0	39.6	49.7
SFC 22M - 16R	22	1	18.3	41	32	26.0	22.0	47.8	57.9
SFC 25M - 12R	25	3/4	21.8	35	38	31.3	26.5	41.1	53.4
SFC 25M - 16R	25	1	21.8	41	38	31.3	26.5	50.0	62.3

* NPT Threads are available upon request

SGC Gauge Connector



Connects Fractional Tubes To ISO Parallel Thread


Part No.	Tube O.D. D (inch)	T G (PF)	d Min	d ₁	Width Across Flat		A	B	I	I ₁	I ₂	L
					h (inch)	H (inch)						
SGC 4 - 4G	1/4	1/4	4.82	5.58	3/4	9/16	15.24	17.78	30.22	13.00	17.00	37.59
SGC 4 - 6G	1/4	3/8	4.82	6.60	15/16	9/16	15.24	17.78	30.22	14.20	20.30	37.59
SGC 4 - 8G	1/4	1/2	4.82	6.60	1-1/16	9/16	15.24	17.78	36.07	18.80	24.90	43.43
SGC 5 - 4G	5/16	1/4	5.58	-	3/4	5/8	16.25	18.54	30.98	13.00	-	38.35
SGC 5 - 8G	5/16	1/2	7.11	-	1-1/16	5/8	16.25	18.54	33.53	18.80	-	40.89
SGC 6 - 4G	3/8	1/4	5.58	-	3/4	11/16	16.76	19.30	31.75	13.00	-	39.12
SGC 6 - 6G	3/8	3/8	6.60	-	15/16	11/16	16.76	19.30	31.24	14.20	-	38.61
SGC 6 - 8G	3/8	1/2	7.11	-	1-1/16	11/16	16.76	19.30	34.54	18.80	-	41.91
SGC 8 - 4G	1/2	1/4	5.58	-	7/8	7/8	22.86	21.84	31.80	13.00	-	41.95
SGC 8 - 6G	1/2	3/8	6.60	-	15/16	7/8	22.86	21.84	34.29	14.20	-	44.45
SGC 8 - 8G	1/2	1/2	7.11	7.11	1-1/16	7/8	22.86	21.84	38.10	18.80	-	48.26

Connects Metric Tubes To ISO Parallel Thread

Part No.	Tube O.D. D	T G (PF)	d Min	d ₁	Width Across Flat		A	B	I	I ₁	I ₂	L
					h	H						
SGC 3M - 4G	3	1/4	2.4	5.5	19	12	12.9	15.3	28.7	13	17	35.3
SGC 6M - 4G	6	1/4	4.8	5.5	19	14	15.3	17.7	30.2	13	17	37.6
SGC 6M - 6G	6	3/8	4.8	6.5	24	14	15.3	17.7	30.2	14	20	37.6
SGC 6M - 8G	6	1/2	4.8	7.0	27	14	15.3	17.7	36.1	19	25	43.5
SGC 8M - 4G	8	1/4	5.5	5.5	19	16	16.2	18.6	31.0	13	-	38.5
SGC 8M - 6G	8	3/8	6.5	6.5	24	16	16.2	18.6	28.7	14	-	36.2
SGC 8M - 8G	8	1/2	7.0	7.0	27	16	16.2	18.6	33.5	19	-	41.0
SGC 10M - 4G	10	1/4	5.5	5.5	19	19	17.2	19.5	31.8	13	-	39.4
SGC 10M - 6G	10	3/8	6.5	6.5	24	19	17.2	19.5	31.2	14	-	38.8
SGC 10M - 8G	10	1/2	7.0	7.0	27	19	17.2	19.5	34.5	19	-	42.1
SGC 12M - 4G	12	1/4	5.5	5.5	22	22	22.8	22.0	31.8	13	-	41.9
SGC 12M - 6G	12	3/8	6.5	6.5	24	22	22.8	22.0	34.3	14	-	44.4
SGC 12M - 8G	12	1/2	7.0	7.0	27	22	22.8	22.0	38.1	19	-	48.2
SGC 20M - 8G	20	1/2	7.0	7.0	30	32	26.0	22.0	44.2	19	-	54.3
SGC 22M - 8G	22	1/2	7.0	7.0	30	32	26.0	22.0	44.2	19	-	54.3

* See page 11 for Explanation of ISO Pipe Thread.

SBMC Bulkhead Male Connector




Connects Fractional Tubes To Female NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat			A	I	I ₁	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
				h (inch)	h ₁ (inch)	H (inch)							
SBMC 2 - 2N	1/8	1/8	2.28	1/2	1/2	7/16	12.70	39.87	24.63	46.48	31.24	8.33	12.70
SBMC 4 - 2N	1/4	1/8	4.82	5/8	5/8	9/16	15.24	42.16	26.16	49.53	33.52	11.50	10.16
SBMC 4 - 4N	1/4	1/4	4.82	5/8	5/8	9/16	15.24	46.73	26.16	54.10	33.52	11.50	10.16
SBMC 6 - 4N	3/8	1/4	7.11	3/4	3/4	11/16	16.76	50.03	29.46	57.40	36.83	14.68	11.17
SBMC 6 - 6N	3/8	3/8	7.11	3/4	3/4	11/16	16.76	50.03	29.46	57.40	36.83	14.68	11.17
SBMC 6 - 8N	3/8	1/2	7.11	7/8	3/4	11/16	16.76	56.38	29.46	63.75	36.83	14.68	11.17
SBMC 8 - 6N	1/2	3/8	9.65	15/16	15/16	7/8	22.86	53.08	31.75	63.24	41.91	19.44	12.70
SBMC 8 - 8N	1/2	1/2	10.41	15/16	15/16	7/8	22.86	58.67	31.75	68.83	41.91	19.44	12.70
SBMC 12 - 12N	3/4	3/4	15.74	1-3/16	1-3/16	1-1/8	24.38	66.04	37.33	76.20	47.49	25.79	16.76
SBMC 16 - 16N	1	1	22.35	1-5/8	1-5/8	1-1/2	31.24	81.02	45.21	93.21	57.40	33.73	19.05

* ISO Tapered Threads are available upon request

SBFC Bulkhead Female Connector



Connects Fractional Tubes To Male NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat			A	I	h ₁	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
				h (inch)	h ₁ (inch)	H (inch)							
SBFC 2 - 2N	1/8	1/8	2.28	9/16	1/2	7/16	12.70	38.10	24.63	44.70	31.24	8.33	12.70
SBFC 4 - 2N	1/4	1/8	4.82	5/8	5/8	9/16	15.24	39.62	26.16	46.99	33.52	11.50	10.16
SBFC 4 - 4N	1/4	1/4	4.82	3/4	5/8	9/16	15.24	44.45	26.16	51.81	33.52	11.50	10.16
SBFC 6 - 4N	3/8	1/4	7.11	3/4	3/4	11/16	16.76	47.75	29.46	55.11	36.83	14.68	11.17
SBFC 8 - 6N	1/2	3/8	10.41	15/16	15/16	7/8	22.86	51.56	31.75	61.72	41.91	19.44	12.70
SBFC 8 - 8N	1/2	1/2	10.41	1-1/16	15/16	7/8	22.86	56.38	31.75	66.54	41.91	19.44	12.70
SBFC 12 - 12N	3/4	3/4	15.74	1-1/4	1-3/16	1-1/8	24.38	63.60	37.33	73.51	47.49	25.79	16.76

* ISO Tapered Threads are available upon request

Connects Metric Tubes To Male NPT Thread

Part No.	Tube O.D. D	T* (NPT)	d Min	Width Across Flat			A	I	h ₁	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
				h	h ₁	H							
SBFC 6M - 2N	6	1/8	4.8	15.8	15.8	14	15.3	39.6	27.7	46.90	35.00	11.5	10.2
SBFC 6M - 4N	6	1/4	4.8	19.0	16.0	14	15.3	44.4	26.2	51.80	33.60	11.5	10.2
SBFC 8M - 4N	8	1/4	6.3	19.0	17.4	16	16.2	46.7	28.4	53.85	35.55	13.1	11.2
SBFC 12M - 8N	12	1/2	9.5	27.0	24.0	22	22.8	56.4	31.8	66.50	41.90	19.5	12.7


* ISO Tapered Threads are available upon request

Elbow & Tee

ELBOWS	
SUE Union Elbow page 31	
SME Male Elbow page 32	
SHME 45° Male Elbow page 35	
SPHME 45° Positionable Male Elbow page 36	
SPME Positionable Male Elbow page 36	
SFE Female Elbow page 38	
TEE	
SUT Union Tee page 39	
SRUT Reducing Union Tee page 40	
SMBT Male Branch Tee page 41	
SPMBT Positionable Male Branch Tee page 42	
SMRT Male Run Tee page 44	
SPMRT Positionable Male Run Tee page 45	
SFBT Female Branch Tee page 47	
SFRT Female Run Tee page 48	
SUC Union Cross page 49	



SUE Union Elbow




Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUE - 1	1/16	1.27	3/8	5/16	8.63	10.92	14.00	18.03
SUE - 2	1/8	2.28	3/8	7/16	12.70	15.24	15.74	22.35
SUE - 3	3/16	3.04	1/2	1/2	13.71	16.00	18.54	25.14
SUE - 4	1/4	4.82	1/2	9/16	15.24	17.78	20.10	27.40
SUE - 5	5/16	6.35	5/8	5/8	16.25	18.54	22.35	29.71
SUE - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUE - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUE - 10	5/8	12.70	15/16	1	24.38	21.84	27.94	38.10
SUE - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87
SUE - 14	7/8	18.28	1-3/8	1-1/4	25.90	21.84	34.54	44.70
SUE - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02
SUE - 20	1-1/4	27.69	1-11/16	1-7/8	41.15	38.86	44.45	66.55
SUE - 24	1-1/2	34.04	2	2-1/4	50.04	45.21	50.80	77.98
SUE - 32	2	45.97	2-3/4	3	67.56	62.74	69.85	107.19

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUE - 2M	2	1.7	9.5	12	12.9	15.3	15.7	22.3
SUE - 3M	3	2.4	9.5	12	12.9	15.3	15.7	22.3
SUE - 4M	4	2.4	12.7	12	13.7	16.1	18.8	25.4
SUE - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUE - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUE - 10M	10	7.9	17.5	19	17.2	19.5	23.9	31.5
SUE - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUE - 15M	15	11.9	23.8	25	24.4	22.0	27.9	38.8
SUE - 16M	16	12.7	23.8	25	24.4	22.0	27.9	38.0
SUE - 18M	18	15.1	27.0	30	24.4	22.0	29.7	39.8
SUE - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUE - 22M	22	18.3	34.9	32	26.0	22.0	34.5	44.6
SUE - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1
SUE - 28M	28	21.8	41	46	36.6	36.6	43.2	64.0
SUE - 30M	30	26.2	46	50	39.6	39.2	48.3	69.9
SUE - 32M	32	28.6	46	50	42.0	41.6	49.3	72.3
SUE - 38M	38	33.7	55	60	49.4	47.9	56.4	84.0


SME Male Elbow



Connects Metric Tubes To Female NPT Thread

Part No.	Tube O.D. D	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SME 3M - 2N	3	1/8	2.4	12.7	12	12.9	15.3	17.0	23.6	17.8
SME 3M - 4N	3	1/4	2.4	12.7	12	12.9	15.3	18.0	24.6	23.4
SME 4M - 2N	4	1/8	2.4	12.7	12	13.7	16.1	18.8	25.4	18.8
SME 4M - 4N	4	1/4	2.4	12.7	12	13.7	16.1	18.8	25.4	23.4
SME 6M - 2N	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SME 6M - 4N	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SME 6M - 6N	6	3/8	4.8	15.9	14	15.3	17.7	22.4	29.8	26.2
SME 6M - 8N	6	1/2	4.8	20.6	14	15.3	17.7	24.4	31.8	33.0
SME 8M - 2N	8	1/8	4.8	14.3	16	16.2	18.6	21.3	28.8	19.8
SME 8M - 4N	8	1/4	6.4	14.3	16	16.2	18.6	21.3	28.8	24.4
SME 8M - 6N	8	3/8	6.4	15.9	16	16.2	18.6	23.1	30.6	26.2
SME 8M - 8N	8	1/2	6.4	20.6	16	16.2	18.6	25.1	32.6	33.0
SME 10M - 2N	10	1/8	4.8	17.5	19	17.2	19.5	23.9	31.5	21.6
SME 10M - 4N	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	26.2
SME 10M - 6N	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	26.2
SME 10M - 8N	10	1/2	7.9	20.6	19	17.2	19.5	25.9	33.5	33.0
SME 12M - 4N	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SME 12M - 6N	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	28.2
SME 12M - 8N	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SME 12M - 12N	12	3/4	9.5	27.0	22	22.8	22.0	29.7	39.8	36.8
SME 16M - 6N	16	3/8	9.5	23.8	25	24.4	22.0	27.9	38.0	30.2
SME 16M - 8N	16	1/2	11.9	23.8	25	24.4	22.0	27.9	38.0	35.1
SME 16M - 12N	16	3/4	12.7	27.0	25	24.4	22.0	29.7	39.8	36.8
SME 18M - 8N	18	1/2	11.9	27.0	30	24.4	22.0	29.7	39.8	36.8
SME 18M - 12N	18	3/4	15.1	27.0	30	24.4	22.0	29.7	39.8	36.8
SME 20M - 8N	20	1/2	11.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 20M - 12N	20	3/4	15.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 22M - 12N	22	3/4	15.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 22M - 16N	22	1	18.3	34.9	32	26.0	22.0	34.5	44.6	46.5
SME 25M - 12N	25	3/4	15.9	34.9	38	31.3	26.5	36.8	49.1	41.7
SME 25M - 16N	25	1	21.8	34.9	38	31.3	26.5	36.8	49.1	46.5
SME 30M - 20N	30	1-1/4	26.2	46	50	39.6	39.2	48.3	69.9	53.1
SME 32M - 20N	32	1-1/4	27.8	46	50	42.0	41.6	49.3	72.3	53.1
SME 38M - 24N	38	1-1/2	33.7	55	60	49.4	47.9	56.4	84.0	60.4


SME Male Elbow



Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube O.D. D	T R (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SME 3M - 2R	3	1/8	2.4	12.7	12	12.9	15.3	17.0	23.6	17.8
SME 3M - 4R	3	1/4	2.4	12.7	12	12.9	15.3	18.0	24.6	23.4
SME 4M - 2R	4	1/8	2.4	12.7	12	13.7	16.1	18.8	25.4	18.8
SME 4M - 4R	4	1/4	2.4	12.7	12	13.7	16.1	18.8	25.4	23.4
SME 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SME 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SME 6M - 6R	6	3/8	4.8	15.9	14	15.3	17.7	22.4	29.8	26.2
SME 6M - 8R	6	1/2	4.8	20.6	14	15.3	17.7	24.4	31.8	33.0
SME 8M - 2R	8	1/8	4.8	14.3	16	16.2	18.6	21.3	28.8	19.8
SME 8M - 4R	8	1/4	6.4	14.3	16	16.2	18.6	21.3	28.8	24.4
SME 8M - 6R	8	3/8	6.4	15.9	16	16.2	18.6	23.1	30.6	26.2
SME 8M - 8R	8	1/2	6.4	20.6	16	16.2	18.6	25.1	32.6	33.0
SME 10M - 4R	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	26.2
SME 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	26.2
SME 10M - 8R	10	1/2	7.9	20.6	19	17.2	19.5	25.9	33.5	33.0
SME 12M - 2R	12	1/8	4.8	20.6	22	22.8	22.0	25.9	36.0	23.6
SME 12M - 4R	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SME 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	28.2
SME 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SME 12M - 12R	12	3/4	9.5	27.0	22	22.8	22.0	29.7	39.8	36.8
SME 16M - 6R	16	3/8	9.5	23.8	25	24.4	22.0	27.9	38.0	30.2
SME 16M - 8R	16	1/2	11.9	23.8	25	24.4	22.0	27.9	38.0	35.1
SME 18M - 8R	18	1/2	11.9	27.0	30	24.4	22.0	29.7	39.8	36.8
SME 18M - 12R	18	3/4	15.1	27.0	30	24.4	22.0	29.7	39.8	36.8
SME 20M - 8R	20	1/2	11.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 20M - 12R	20	3/4	15.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 22M - 12R	22	3/4	15.9	34.9	32	26.0	22.0	34.5	44.6	41.7
SME 22M - 16R	22	1	18.3	34.9	32	26.0	22.0	34.5	44.6	46.5
SME 25M - 12R	25	3/4	15.9	34.9	38	31.3	26.5	36.8	49.1	41.7
SME 25M - 16R	25	1	21.8	34.9	38	31.3	26.5	36.8	49.1	46.5


SME Male Elbow



Connects Fractional Tube To Female NPT Thread

Part No.	Tube O.D. D (inch)	T (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SME 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.00	24.30	18.80
SME 2 - 4N	1/8	1/4	2.28	1/2	7/16	12.70	15.24	18.00	24.30	23.36
SME 3 - 2N	3/16	1/8	3.04	1/2	1/2	13.71	16.00	18.79	25.40	18.79
SME 3 - 4N	3/16	1/4	3.04	1/2	1/2	13.71	16.00	18.79	25.40	23.36
SME 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SME 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SME 4 - 6N	1/4	3/8	4.82	5/8	9/16	15.24	17.78	22.35	29.71	26.16
SME 4 - 8N	1/4	1/2	4.82	13/16	9/16	15.24	17.78	24.38	31.75	33.02
SME 5 - 2N	5/16	1/8	4.82	9/16	5/8	16.25	18.54	21.33	28.70	19.81
SME 5 - 4N	5/16	1/4	6.35	9/16	5/8	16.25	18.54	21.33	28.70	24.38
SME 5 - 6N	5/16	3/8	6.35	11/16	5/8	16.25	18.54	23.11	30.48	26.16
SME 6 - 2N	3/8	1/8	4.82	5/8	11/16	16.76	19.30	23.11	30.48	20.82
SME 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SME 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.87	31.24	26.16
SME 6 - 8N	3/8	1/2	7.11	13/16	11/16	16.76	19.30	25.90	33.27	33.02
SME 6 - 12N	3/8	3/4	7.11	1-1/16	11/16	16.76	19.30	29.71	37.08	36.83
SME 8 - 4N	1/2	1/4	7.11	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SME 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SME 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SME 8 - 12N	1/2	3/4	10.41	1-1/16	7/8	22.86	21.84	29.71	39.87	36.83
SME 10 - 6N	5/8	3/8	9.65	15/16	1	24.38	21.84	27.94	38.10	30.22
SME 10 - 8N	5/8	1/2	11.93	15/16	1	24.38	21.84	27.94	38.10	35.10
SME 10 - 12N	5/8	3/4	12.70	1-1/16	1	24.38	21.84	29.71	39.87	36.83
SME 12 - 8N	3/4	1/2	11.93	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83
SME 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83
SME 14 - 12N	7/8	3/4	15.74	1-3/8	1-1/4	25.90	21.84	34.54	44.70	41.65
SME 16 - 1 2N	1	3/4	15.74	1-3/8	1-1/2	31.24	26.41	36.83	49.02	41.65
SME 16 - 16N	1	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	46.48
SME 20 - 20N	1-1/4	1-1/4	27.69	1-11/16	1-7/8	41.15	38.86	44.45	66.55	47.75
SME 24 - 24N	1-1/2	1-1/2	34.04	2	2-1/4	50.04	45.21	50.80	77.98	60.45
SME 32 - 32N	2	2	45.97	2-3/4	3	67.56	62.74	69.85	107.19	70.61


SME Male Elbow



Connects Fractional Tubes To Female ISO Tapered Thread

Part No.	Tube O.D. D (inch)	T R (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SME 4 - 2R	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SME 4 - 4R	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SME 4 - 6R	1/4	3/8	4.82	5/8	9/16	15.24	17.78	22.35	29.71	26.16
SME 4 - 8R	1/4	1/2	4.82	13/16	9/16	15.24	17.78	24.38	31.75	33.02
SME 5 - 4R	5/16	1/4	6.35	9/16	5/8	16.25	18.54	21.33	28.70	24.38
SME 6 - 4R	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SME 6 - 6R	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.87	31.24	26.16
SME 8 - 6R	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.91	36.07	28.20
SME 8 - 8R	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.91	36.07	33.02

SHME 45° Male Elbow




Connects Fractional Tubes To Female NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SHME 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	17.27	24.63	16.51
SHME 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	17.27	24.63	21.08
SHME 6 - 2N	3/8	1/8	4.82	5/8	11/16	16.76	19.30	20.57	27.94	18.28
SHME 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	20.57	27.94	22.86
SHME 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	21.84	29.21	24.13
SHME 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	21.84	32.00	24.13
SHME 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	21.84	32.00	28.95

* ISO Tapered Threads are available upon request


SPHME 45° Positionable Male Elbow



Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube O.D. D (inch)	T (U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPHME 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	18.29	25.64	25.65	16.51
SPHME 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	20.57	27.94	28.19	20.07
SPHME 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	21.84	32.00	32.26	25.65
SPHME 12 - 12U	3/4	1-1/16-12	15.75	1-1/8	1-1/4	1-1/8	24.38	24.84	29.72	39.88	47.24	36.58
SPHME 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	35.31	47.50	50.55	43.94


SPME Positionable Male Elbow



Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube O.D. D (inch)	T (U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPME 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPME 4 - 6U	1/4	9/16-18	4.83	5/8	11/16	9/16	15.24	17.78	23.11	30.48	32.26	20.07
SPME 5 - 5U	5/16	1/2-20	5.84	9/16	5/8	5/8	16.26	18.54	22.86	30.23	29.46	18.29
SPME 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPME 6 - 8U	3/8	3/4-16	7.11	13/16	7/8	11/16	16.76	19.30	27.43	34.80	37.85	25.65
SPME 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPME 10 - 10U	5/8	7/8-14	12.70	15/16	1	1	24.38	21.84	29.46	39.62	43.43	29.46
SPME 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	21.84	31.24	41.40	48.77	36.58
SPME 14 - 14U	7/8	3/16-12	18.29	1-3/16	1-3/8	1-1/4	25.91	21.84	33.02	43.18	50.55	40.39
SPME 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94
SPME 20 - 20U	1-1/4	1-5/8-12	27.69	1-11/16	1-7/8	1-7/8	41.15	38.86	45.72	67.82	58.17	54.86
SPME 24 - 24U	1-1/2	1-7/8-12	34.04	2	2-1/8	2-1/4	50.04	45.21	50.80	77.98	60.45	62.23
SPME 32 - 32U	2-1/2	2-1/2-12	45.97	2-3/4	2-3/4	3	67.56	62.74	69.85	107.19	71.63	80.26

SPME Positionable Male Elbow




Connects Fractional Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPME 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPME 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPME 6 - 4G	3/8	1/4	5.84	5/8	3/4	11/16	16.76	19.30	23.11	30.48	32.26	22.86
SPME 6 - 6G	3/8	3/8	7.11	13/16	7/8	11/16	16.76	19.30	25.91	33.27	37.08	26.42
SPME 8 - 4G	1/2	1/4	5.84	13/16	3/4	7/8	22.86	21.84	25.91	36.07	35.05	26.42
SPME 8 - 6G	1/2	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	22.86
SPME 8 - 8G	1/2	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	26.42
SPME 10 - 8G	5/8	1/2	11.94	15/16	1-1/16	1	24.38	21.84	27.94	38.10	43.43	32.00
SPME 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPME 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPME 16 - 12G	1	3/4	15.75	1-3/8	1-3/8	1-1/2	31.24	26.42	36.83	49.02	53.34	41.15
SPME 16 - 16G	1	1	19.81	1-3/8	1-3/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPME 6M - 2G	6	1/8	4.0	1/2	9/16	14	15.3	17.7	19.6	27.0	26.4	17.3
SPME 6M - 4G	6	1/4	4.8	5/8	3/4	14	15.3	17.7	21.6	29.0	32.3	22.9
SPME 8M - 2G	8	1/8	4.0	9/16	9/16	16	16.2	18.6	21.3	28.8	27.4	17.3
SPME 8M - 4G	8	1/4	5.9	5/8	3/4	16	16.2	18.6	22.4	29.9	32.2	22.9
SPME 10M - 4G	10	1/4	5.9	13/16	3/4	19	17.2	19.5	25.9	33.5	35.0	22.9
SPME 10M - 6G	10	3/8	7.9	13/16	7/8	19	17.2	19.5	25.9	33.5	37.1	26.4
SPME 12M - 4G	12	1/4	5.9	13/16	3/4	22	22.8	22.0	25.9	36.0	35.0	22.9
SPME 12M - 6G	12	3/8	7.9	13/16	7/8	22	22.8	22.0	25.9	36.0	37.1	26.4
SPME 12M - 8G	12	1/2	9.5	15/16	1-1/16	22	22.8	22.0	27.9	38.0	43.4	32.0
SPME 12M - 12G	12	3/4	9.5	1-1/16	1-3/8	22	22.8	22.0	29.7	39.8	48.8	41.1

SFE Female Elbow



Connects Fractional Tubes To Male NPT Thread

Part No.	Tube O.D. D (inch)	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFE 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.03	24.63	19.05
SFE 2 - 4N	1/8	1/4	2.28	11/16	7/16	12.70	15.24	20.82	27.43	22.35
SFE 3 - 2N	3/16	1/8	3.04	1/2	1/2	13.71	16.00	18.79	25.40	19.05
SFE 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFE 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFE 4 - 6N	1/4	3/8	4.82	13/16	9/16	15.24	17.78	24.38	31.75	22.35
SFE 4 - 8N	1/4	1/2	4.82	1	9/16	15.24	17.78	27.17	34.54	28.44
SFE 5 - 2N	5/16	1/8	6.35	9/16	5/8	16.25	18.54	21.33	28.70	19.05
SFE 5 - 4N	5/16	1/4	6.35	11/16	5/8	16.25	18.54	23.11	30.48	22.35
SFE 6 - 2N	3/8	1/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48	19.05
SFE 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFE 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	25.90	33.27	22.35
SFE 6 - 8N	3/8	1/2	7.11	1	11/16	16.76	19.30	28.70	36.06	28.44
SFE 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFE 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFE 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	38.86	37.00
SFE 10 - 6N	5/8	3/8	12.70	15/16	1	24.38	21.84	27.94	38.10	22.35
SFE 10 - 8N	5/8	1/2	12.70	1-1/16	1	24.38	21.84	29.71	39.87	28.44
SFE 12 - 8N	3/4	1/2	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	28.44
SFE 12 - 12N	3/4	3/4	15.74	1-3/8	1-1/8	24.38	21.84	34.54	44.70	31.75
SFE 14 - 12N	7/8	3/4	18.28	1-3/8	1-1/4	25.90	21.84	34.54	44.70	31.75
SFE 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFE 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10

* ISO Tapered Threads are available upon request


Connects Metric Tubes To Male NPT Thread

Part No.	Tube O.D. D	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFE 6M - 4N	6	1/4	4.8	17.46	14	15.3	17.7	22.4	29.8	22.40
SFE 6M - 6N	6	3/8	4.8	20.63	14	15.3	17.7	24.4	31.7	22.40
SFE 6M - 8N	6	1/2	4.8	25.40	14	15.3	17.7	27.2	34.6	28.40
SFE 8M - 4N	8	1/4	6.4	17.46	16	16.2	18.6	23.1	30.6	22.40
SFE 8M - 8N	8	1/2	6.4	20.63	16	16.2	18.6	28.0	35.2	28.40
SFE 10M - 4N	10	1/4	7.9	17.46	19	17.2	19.5	25.9	33.5	22.40
SFE 10M - 6N	10	3/8	7.9	20.63	19	17.2	19.5	25.9	33.5	22.40
SFE 10M - 8N	10	1/2	7.9	25.40	19	17.2	19.5	28.7	36.1	28.40
SFE 12M - 6N	12	3/8	9.5	20.63	22	22.8	22.0	25.9	36.2	22.35
SFE 12M - 8N	12	1/2	9.5	25.40	22	22.8	22.0	28.7	38.8	28.40

* ISO Tapered Threads are available upon request

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SUT Union Tee

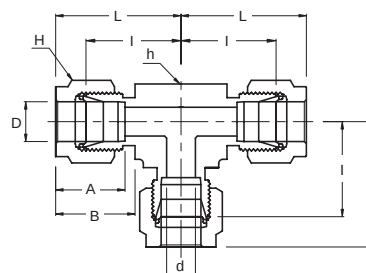


Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUT - 1	1/16	1.27	3/8	5/16	8.63	10.92	14.00	18.03
SUT - 2	1/8	2.28	3/8	7/16	12.70	15.24	15.80	22.35
SUT - 3	3/16	3.04	1/2	1/2	13.71	16.00	18.54	25.14
SUT - 4	1/4	4.82	1/2	9/16	15.24	17.78	20.10	27.40
SUT - 5	5/16	6.35	5/8	5/8	16.25	18.54	22.35	29.71
SUT - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUT - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUT - 10	5/8	12.70	1	1	24.38	21.84	28.70	38.86
SUT - 12	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87
SUT - 14	7/8	18.28	1-3/8	1-1/4	25.90	21.84	34.54	44.70
SUT - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02
SUT - 20	1-1/4	27.69	1-11/16	1-7/8	41.15	38.86	44.45	66.55
SUT - 24	1-1/2	34.04	2	2-1/4	50.04	45.21	50.80	77.98
SUT - 32	2	45.97	2-3/4	3	67.56	62.74	69.85	107.19

Connects Metric Tubes

Part No.	Tube O.D. D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUT - 2M	2	1.7	9.5	12	12.9	15.3	15.7	22.3
SUT - 3M	3	2.4	9.5	12	12.9	15.3	15.7	22.3
SUT - 4M	4	2.4	12.7	12	13.7	16.1	18.8	25.4
SUT - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUT - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUT - 10M	10	7.9	17.5	19	17.2	19.5	23.9	31.5
SUT - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUT - 15M	15	11.9	25.4	25	24.4	22.0	28.7	38.8
SUT - 16M	16	12.7	25.4	25	24.4	22.0	28.7	38.8
SUT - 18M	18	15.1	27.0	30	24.4	22.0	29.7	38.8
SUT - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUT - 22M	22	18.3	34.9	32	26.0	22.0	34.5	44.6
SUT - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1
SUT - 28M	28	21.8	41	46	36.6	36.6	43.2	64.0
SUT - 30M	30	26.2	46	50	39.6	39.2	48.3	69.9
SUT - 32M	32	28.6	46	50	42.0	41.6	49.3	72.3
SUT - 38M	38	33.7	55	60	49.4	47.9	56.4	84.0


SRUT Reducing Union Tee



Connects Fractional Tubes

Part No.	Tube O.D.		d Min	Width Across Flat			A	A ₁	B	B ₁	I	I ₁	I ₂	L	L ₁	L ₂
	D (inch)	D ₁ (inch)		h (inch)	H (inch)	H ₁ (inch)										
SRUT 6 - 6 - 4	3/8	1/4	4.82	5/8	11/16	9/16	16.76	15.24	19.30	17.78	46.22	23.11	21.59	60.96	30.48	28.95
SRUT 8 - 8 - 4	1/2	1/4	4.82	13/16	7/8	9/16	22.86	15.24	21.84	17.78	51.81	25.90	24.38	72.13	36.06	31.75
SRUT 8 - 8 - 6	1/2	3/8	7.11	13/16	7/8	11/16	22.86	16.76	21.84	19.30	51.81	25.90	25.90	72.13	36.06	33.27
SRUT 10 -10 - 6	5/8	3/8	7.11	1	1	11/16	24.38	16.76	21.84	19.30	57.40	28.70	28.70	77.72	38.86	36.06
SRUT 12 -12 - 6	3/4	3/8	7.11	1 1/16	1 1/8	11/16	24.38	16.76	21.84	19.30	59.43	29.71	29.71	79.75	39.87	37.08
SRUT 12 -12 - 8	3/4	1/2	10.41	1 1/16	1 1/8	7/8	24.38	22.86	21.84	21.84	59.43	29.71	29.71	79.75	39.87	39.87
SRUT 16 -16 - 6	1	3/8	7.11	1 3/8	1 1/2	1 1/16	31.24	16.76	26.41	19.30	73.66	36.83	34.54	98.04	49.02	41.91
SRUT 16 -16 - 8	1	1/2	10.41	1 3/8	1 1/2	7/8	31.24	21.84	26.41	22.86	73.66	36.83	34.54	98.04	49.02	44.70
SRUT 16 -16 -12	1	3/4	15.74	1 3/8	1 1/2	1 1/8	31.24	24.38	26.41	21.84	73.66	36.83	34.54	98.04	49.02	44.70

SMBT Male Branch Tee



Connects Fractional Tubes To Female NPT Thread

Part No.	Tube O.D. D (inch)	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SMBT 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.30	24.91	18.90
SMBT 2 - 4N	1/8	1/4	2.28	1/2	7/16	12.70	15.24	18.03	24.63	23.36
SMBT 3 - 2N	3/16	1/8	3.04	1/2	1/2	13.71	16.00	17.78	25.40	18.79
SMBT 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SMBT 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SMBT 5 - 2N	5/16	1/8	4.82	5/8	5/8	16.25	18.54	22.35	29.71	20.82
SMBT 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SMBT 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.10	30.48	28.19
SMBT 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMBT 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SMBT 10 - 8N	5/8	1/2	11.93	1	1	24.38	21.84	28.70	38.86	35.81
SMBT 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83


* ISO Tapered Threads are available upon request

Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube O.D. D	T * R (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SMBT 3M - 2R	3	1/8	2.4	12.7	12	12.9	15.3	17.0	23.6	17.8
SMBT 3M - 4R	3	1/4	2.4	12.7	12	12.9	15.3	18.0	24.6	23.4
SMBT 4M - 2R	4	1/8	2.4	12.7	12	13.7	16.1	18.8	25.4	18.8
SMBT 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SMBT 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SMBT 8M - 2R	8	1/8	4.8	15.9	16	16.2	18.6	22.4	29.9	20.8
SMBT 8M - 4R	8	1/4	6.4	15.9	16	16.2	18.6	22.4	29.9	25.4
SMBT 10M - 4R	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	28.2
SMBT 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	28.2
SMBT 12M - 4R	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SMBT 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	28.2
SMBT 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SMBT 16M - 6R	16	3/8	9.5	25.4	25	24.4	22.0	27.9	38.0	30.2
SMBT 16M - 8R	16	1/2	11.9	25.4	25	24.4	22.0	27.9	38.0	35.1
SMBT 20M - 12R	20	3/4	15.9	31.8	32	26.0	22.0	34.5	44.6	41.7

* NPT Threads are available upon request

SPMBT Positionable Male Branch Tee



Connects Fractional Tubes To Female ISO Parallel Thread


Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMBT 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPMBT 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPMBT 6 - 4G	3/8	1/4	5.08	5/8	3/4	11/16	15.24	19.30	23.11	30.48	32.26	22.86
SPMBT 8 - 6G	3/8	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	26.42
SPMBT 8 - 8G	1/2	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	32.00
SPMBT 10 - 8G	5/8	1/2	11.94	15/16	1-1/16	1	24.38	21.84	27.94	38.10	43.43	32.00
SPMBT 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPMBT 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPMBT 16 - 16G	1	1	19.81	1-3/8	1-5/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMBT 6M - 2G	6	1/8	4.0	1/2	9/16	14	15.3	17.7	19.6	27.0	26.4	17.3
SPMBT 6M - 4G	6	1/4	4.8	5/8	3/4	14	15.3	17.7	21.6	29.0	32.3	22.9
SPMBT 8M - 2G	8	1/8	4.0	9/16	9/16	16	16.2	18.6	21.3	28.8	27.4	17.3
SPMBT 8M - 4G	8	1/4	5.9	5/8	3/4	16	16.2	18.6	22.4	29.9	32.2	22.9
SPMBT 10M - 4G	10	1/4	5.9	13/16	3/4	19	17.2	19.5	25.9	33.5	35.0	22.9
SPMBT 12M - 6G	10	3/8	7.9	13/16	7/8	22	22.8	22.0	25.9	36.0	37.1	26.4
SPMBT 12M - 8G	12	1/4	9.5	15/16	1-1/16	22	22.8	22.0	27.9	38.0	35.0	32.0

SPMBT


Positionable Male Branch Tee



Connects Fractional Tubes To SAE/MS Straight Thread Boss

Part No.	Tube O.D. D (inch)	T (U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMBT 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPMBT 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPMBT 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPMBT 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	21.84	31.24	41.40	48.77	36.58
SPMBT 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94
SPMBT 20 - 20U	1-1/4	1-5/8-12	27.69	1-11/16	1-7/8	1-7/8	41.15	38.86	45.72	67.82	58.17	54.86
SPMBT 24 - 24U	1-1/2	1-7/8-12	34.04	2	2-1/8	2-1/4	50.04	45.21	50.80	77.98	60.45	62.23
SPMBT 32 - 32U	2	2-1/2-12	45.97	2-3/4	2-3/4	3	67.56	62.74	69.85	107.19	71.63	80.26

SMRT Male Run Tee



Connects Fractional Tubes To Female NPT Thread

Part No.	Tube O.D. D (inch)	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SMRT 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.30	24.91	18.90
SMRT 2 - 4N	1/8	1/4	2.28	1/2	7/16	12.70	15.24	18.03	24.63	23.36
SMRT 3 - 2N	3/16	1/8	3.04	1/2	1/2	13.71	16.00	17.78	25.40	18.79
SMRT 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	18.79
SMRT 4 - 4N	1/4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92	23.36
SMRT 5 - 2N	5/16	1/8	4.82	5/8	5/8	16.25	18.54	22.35	29.71	20.82
SMRT 6 - 4N	3/8	1/4	7.11	5/8	11/16	16.76	19.30	23.11	30.48	25.40
SMRT 6 - 6N	3/8	3/8	7.11	5/8	11/16	16.76	19.30	23.10	30.48	28.19
SMRT 8 - 6N	1/2	3/8	9.65	13/16	7/8	22.86	21.84	25.90	36.06	28.19
SMRT 8 - 8N	1/2	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06	33.02
SMRT 10 - 8N	5/8	1/2	11.93	1	1	24.38	21.84	28.70	38.86	35.81
SMRT 12 - 12N	3/4	3/4	15.74	1-1/16	1-1/8	24.38	21.84	29.71	39.87	36.83

* ISO Tapered Threads are available upon request


Connects Metric Tubes To Female ISO Tapered Thread

Part No.	Tube O.D. D	T * R (PT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SMRT 3M - 2R	3	1/8	2.4	12.7	12	12.9	15.3	17.0	23.6	17.8
SMRT 3M - 4R	3	1/4	2.4	12.7	12	12.9	15.3	18.0	24.6	23.4
SMRT 4M - 2R	4	1/8	2.4	12.7	12	13.7	16.1	18.8	25.4	18.8
SMRT 6M - 2R	6	1/8	4.8	12.7	14	15.3	17.7	19.6	27.0	18.8
SMRT 6M - 4R	6	1/4	4.8	12.7	14	15.3	17.7	19.6	27.0	23.4
SMRT 8M - 2R	8	1/8	4.8	15.9	16	16.2	18.6	22.4	29.9	20.8
SMRT 8M - 4R	8	1/4	6.4	15.9	16	16.2	18.6	22.4	29.9	25.4
SMRT 10M - 4R	10	1/4	7.1	17.5	19	17.2	19.5	23.9	31.5	28.2
SMRT 10M - 6R	10	3/8	7.9	17.5	19	17.2	19.5	23.9	31.5	28.2
SMRT 12M - 4R	12	1/4	7.1	20.6	22	22.8	22.0	25.9	36.0	28.2
SMRT 12M - 6R	12	3/8	9.5	20.6	22	22.8	22.0	25.9	36.0	28.2
SMRT 12M - 8R	12	1/2	9.5	20.6	22	22.8	22.0	25.9	36.0	33.0
SMRT 16M - 6R	16	3/8	9.5	25.4	25	24.4	22.0	27.9	38.0	30.2
SMRT 16M - 8R	16	1/2	11.9	25.4	25	24.4	22.0	27.9	38.0	35.1
SMRT 20M - 12R	20	3/4	15.9	31.8	32	26.0	22.0	34.5	44.6	41.7

* NPT Threads are available upon request

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SPMRT Positionable Male Run Tee

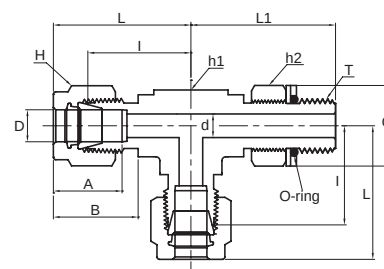


Connects Fractional Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMRT 4 - 2G	1/4	1/8	4.06	1/2	9/16	9/16	15.24	17.78	19.56	26.92	26.42	17.27
SPMRT 4 - 4G	1/4	1/4	4.83	5/8	3/4	9/16	15.24	17.78	21.59	28.96	32.26	22.86
SPMRT 6 - 4G	3/8	1/4	5.84	5/8	3/4	11/16	16.76	19.30	23.11	30.48	32.26	22.86
SPMRT 8 - 6G	1/4	3/8	7.87	13/16	7/8	7/8	22.86	21.84	25.91	36.07	37.08	26.42
SPMRT 8 - 8G	3/8	1/2	10.41	15/16	1-1/16	7/8	22.86	21.84	27.94	38.10	43.43	32.00
SPMRT 10 - 8G	1/2	1/2	11.94	15/16	1-1/16	1	24.38	21.84	27.94	38.10	43.43	32.00
SPMRT 12 - 8G	3/4	1/2	11.94	1-1/16	1-1/16	1-1/8	24.38	21.84	29.72	39.88	45.21	32.00
SPMRT 12 - 12G	3/4	3/4	15.75	1-1/16	1-3/8	1-1/8	24.38	21.84	29.72	39.88	48.77	41.15
SPMRT 16 - 16G	1	1	19.81	1-3/8	1-5/8	1-1/2	31.24	26.42	36.83	49.02	53.59	48.51

Connects Metric Tubes To Female ISO Parallel Thread

Part No.	Tube O.D. D (inch)	T (PF)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMRT 6M - 2G	6	1/8	4.0	1/2	9/16	14	15.3	17.7	19.6	27.0	26.4	17.3
SPMRT 6M - 4G	6	1/4	4.8	5/8	3/4	14	15.3	17.7	21.6	29.0	32.2	22.9
SPMRT 8M - 2G	8	1/8	4.0	9/16	9/16	16	16.2	18.6	21.3	28.8	27.4	17.3
SPMRT 8M - 4G	8	1/4	6.4	5/8	3/4	16	16.2	18.6	22.4	29.9	32.2	22.9
SPMRT 10M - 4G	10	1/4	5.9	13/16	3/4	19	17.2	19.5	25.9	33.5	35.0	22.9
SPMRT 12M - 6G	10	3/8	7.9	13/16	7/8	22	22.8	22.0	25.9	36.0	37.1	26.4
SPMRT 12M - 8G	12	1/2	9.5	15/16	1-1/16	22	22.8	22.0	27.9	38.0	43.4	22.9


SPMRT Positionable Male Run Tee

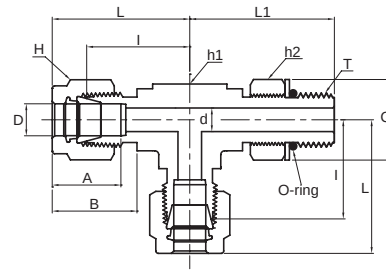

Connects Fractional Tubes To SAE/MS Straight Thread

Part No.	Tube O.D. D (inch)	T (U)	d Min	Width Across Flat			A	B	I	L	L1	C
				h1	h2	H						
SPMRT 4 - 4U	1/4	7/16-20	4.83	1/2	9/16	9/16	15.24	17.78	21.08	28.45	28.45	16.51
SPMRT 6 - 6U	3/8	9/16-18	7.11	5/8	11/16	11/16	16.76	19.30	24.64	32.00	32.26	20.07
SPMRT 8 - 8U	1/2	3/4-16	10.41	13/16	7/8	7/8	22.86	21.84	27.43	37.59	37.85	25.65
SPMRT 12 - 12U	3/4	1-1/16-12	15.75	1-1/16	1-1/4	1-1/8	24.38	21.84	31.24	41.40	48.77	36.58
SPMRT 16 - 16U	1	1-5/16-12	22.35	1-3/8	1-1/2	1-1/2	31.24	26.42	38.35	50.55	53.59	43.94
SPMRT 20 - 20U	1-1/4	1-5/8-12	27.69	1-11/16	1-7/8	1-7/8	41.15	38.86	45.72	67.82	58.17	54.86
SPMRT 24 - 24U	1-1/2	1-7/8-12	34.04	2	2-1/8	2-1/4	50.04	45.21	50.80	77.98	60.45	62.23
SPMRT 32 - 32U	2	2-1/2-12	45.97	2-3/4	2-3/4	3	67.56	62.74	69.85	107.19	71.63	80.26

SFBT Female Branch Tee

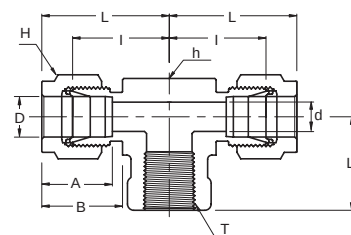

Connects Fractional Tubes To Male NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFBT 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.03	24.63	19.05
SFBT 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFBT 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFBT 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFBT 6 - 6N	3/8	3/8	7.11	13/16	11/16	16.76	19.30	25.90	33.27	22.35
SFBT 6 - 8N	3/8	1/2	7.11	1	11/16	16.76	19.30	28.70	36.07	28.45
SFBT 8 - 4N	1/2	1/4	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFBT 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFBT 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	38.86	28.44
SFBT 10 - 8N	5/8	1/2	12.70	1	1	24.38	21.84	28.70	38.86	28.44
SFBT 12 - 12N	3/4	3/4	15.74	1-3/8	1-1/8	24.38	21.84	34.54	44.70	31.75
SFBT 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFBT 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10


* ISO Tapered Threads are available upon request

Connects Metric Tubes To Male NPT Thread

Part No.	Tube O.D. D	T* (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFBT 6M - 2N	6	1/8	4.8	12.70	14	15.3	17.7	19.6	27.0	19.0
SFBT 6M - 4N	6	1/4	4.8	17.46	14	15.3	17.7	22.4	29.8	22.4
SFBT 6M - 6N	6	3/8	4.8	20.63	14	15.3	17.7	24.4	31.7	22.4
SFBT 6M - 8N	6	1/2	4.8	25.40	14	15.3	17.7	27.2	34.5	28.4
SFBT 8M - 2N	8	1/8	6.4	15.87	16	16.2	18.6	22.4	29.9	19.0
SFBT 8M - 4N	8	1/4	6.4	17.46	16	16.2	18.6	23.1	30.6	22.4
SFBT 8M - 6N	8	3/8	6.4	20.63	16	16.2	18.6	25.2	32.4	22.4
SFBT 8M - 8N	8	1/2	6.4	25.40	16	16.2	18.6	28.0	35.2	28.4
SFBT 10M - 4N	10	1/4	7.9	20.63	19	17.2	19.5	25.9	33.5	22.4
SFBT 10M - 6N	10	3/8	7.9	20.63	19	17.2	19.5	25.9	33.3	22.4
SFBT 10M - 8N	10	1/2	9.5	25.40	19	17.2	19.5	26.2	33.6	22.4
SFBT 12M - 4N	12	1/4	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
SFBT 12M - 6N	12	3/8	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
SFBT 12M - 8N	12	1/2	9.5	25.40	22	22.8	22.0	29.7	40.0	28.4
SFBT 16M - 8N	16	1/2	12.7	25.40	25	24.4	22.0	28.7	38.8	28.4

* ISO Tapered Threads are available upon request

SFRT Female Run Tee



Connects Fractional Tubes To Male NPT Thread

Part No.	Tube O.D. D (inch)	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h (inch)	H (inch)					
SFRT 2 - 2N	1/8	1/8	2.28	1/2	7/16	12.70	15.24	18.03	24.63	19.05
SFRT 4 - 2N	1/4	1/8	4.82	1/2	9/16	15.24	17.78	19.55	26.92	19.05
SFRT 4 - 4N	1/4	1/4	4.82	11/16	9/16	15.24	17.78	22.35	29.71	22.35
SFRT 6 - 4N	3/8	1/4	7.11	11/16	11/16	16.76	19.30	23.87	31.24	22.35
SFRT 8 - 6N	1/2	3/8	10.41	13/16	7/8	22.86	21.84	25.90	36.06	22.35
SFRT 8 - 8N	1/2	1/2	10.41	1	7/8	22.86	21.84	28.70	39.87	28.44
SFRT 12 - 12N	3/4	3/4	15.74	1-3/8	1-1/8	24.38	21.84	34.54	44.70	31.75
SFRT 16 - 12N	1	3/4	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02	31.75
SFRT 16 - 16N	1	1	22.35	1-11/16	1-1/2	31.24	26.41	41.40	53.59	38.10



* ISO Tapered Threads are available upon request

Connects Metric Tubes To Male NPT Thread

Part No.	Tube O.D. D	T * (NPT)	d Min	Width Across Flat		A	B	I	L	L ₁
				h	H					
SFRT 6M - 2N	6	1/8	4.8	12.70	14	15.3	17.7	19.6	27.0	19.0
SFRT 6M - 4N	6	1/4	4.8	17.46	14	15.3	17.7	22.4	29.8	22.4
SFRT 6M - 8N	6	1/2	4.8	25.40	14	15.3	17.7	27.2	34.5	28.4
SFRT 8M - 2N	8	1/8	6.4	15.87	16	16.2	18.6	22.4	29.9	19.0
SFRT 8M - 4N	8	1/4	6.4	17.46	16	16.2	18.6	23.1	30.6	22.4
SFRT 8M - 6N	8	3/8	6.4	20.63	16	16.2	18.6	25.2	32.4	22.4
SFRT 8M - 8N	8	1/2	6.4	25.40	16	16.2	18.6	28.0	35.2	28.4
SFRT 12M - 4N	12	1/4	9.5	20.63	22	22.8	22.0	25.9	33.5	22.4
SFRT 12M - 6N	12	3/8	9.5	20.63	22	22.8	22.0	25.9	36.0	22.4
SFRT 12M - 8N	12	1/2	9.5	25.40	22	22.8	22.0	29.7	40.0	28.4
SFRT 16M - 8N	16	1/2	12.7	25.40	25	24.4	22.0	29.7	39.8	28.4

* ISO Tapered Threads are available upon request

SUC Union Cross

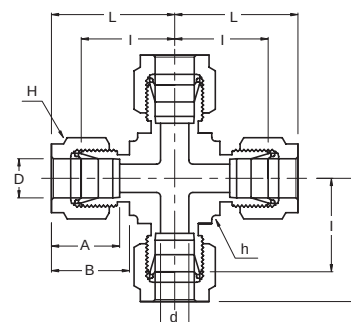

Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	B	I	L
			h (inch)	H (inch)				
SUC - 1	1/16	1.27	3/8	5/16	8.63	10.92	14.00	18.03
SUC - 2	1/8	2.28	3/8	7/16	12.70	15.24	15.74	22.35
SUC - 3	3/16	3.04	1/2	1/2	13.71	16.00	18.54	25.14
SUC - 4	1/4	4.82	1/2	9/16	15.24	17.78	19.55	26.92
SUC - 5	5/16	6.35	5/8	5/8	16.25	18.54	22.35	29.71
SUC - 6	3/8	7.11	5/8	11/16	16.76	19.30	23.11	30.48
SUC - 8	1/2	10.41	13/16	7/8	22.86	21.84	25.90	36.06
SUC - 10	5/8	12.70	15/16	1	24.38	21.84	28.70	38.80
SUC - 12	3/4	15.74	1	1-1/8	24.38	21.84	29.71	39.87
SUC - 14	7/8	18.28	1-3/8	1-1/4	25.90	21.84	34.54	44.70
SUC - 16	1	22.35	1-3/8	1-1/2	31.24	26.41	36.83	49.02

Connects Metric Tubes


Part No.	Tube O.D. D	d Min	Width Across Flat		A	B	I	L
			h	H				
SUC - 3M	3	2.4	9.5	12	12.9	15.3	15.7	22.3
SUC - 6M	6	4.8	12.7	14	15.3	17.7	19.6	27.0
SUC - 8M	8	6.4	15.9	16	16.2	18.6	22.4	29.9
SUC - 10M	10	7.9	20.6	19	17.2	19.5	25.9	33.5
SUC - 12M	12	9.5	20.6	22	22.8	22.0	25.9	36.0
SUC - 16M	16	12.7	23.8	25	24.4	22.0	26.9	37.0
SUC - 18M	18	15.1	25.4	30	24.4	22.0	28.2	38.3
SUC - 20M	20	15.9	34.9	32	26.0	22.0	34.5	44.6
SUC - 25M	25	21.8	34.9	38	31.3	26.5	36.8	49.1

Stub Tube Connector, An Tube & O-Ring Seal



STUB TUBE CONNECTOR		
SR Reducer		
page 51		
SBR Bulkhead Reducer		
page 53		
SMA Male Adapter		
page 54		
SFA Female Adapter		
page 55		
SPC Port Connector		
page 56		
SRPC Reducing Port Connector		
page 57		
SFTC Flange Lapped Tubes Connector		
page 58		
AN TUBE		
SAF An Flare		
page 58		
SAU An Union		
page 59		
SAA An Adapter		
page 59		
O-RING SEAL		
SOSC O-Seal Straight Thread Connector		
page 60		
SOPC O-Seal Pipe Thread Connector		
page 60		
SSMC SAE/MS Male Connector		
page 61		

SR Reducer

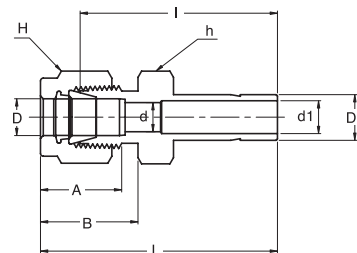


Connects Fractional Tubes To Fractional **SUPERLOK** Port

Part No.	Tube O.D.		d Min	d1 Min	Width Across Flat		A	B	I	L
	D (inch)	D ₁ (inch)			h (inch)	H (inch)				
SR 2 - 1	1/8	1/16	2.28	0.8	7/16	7/16	12.70	15.24	22.35	28.95
SR 2 - 2	1/8	1/8	2.28	2.1	7/16	7/16	12.70	15.24	26.92	33.52
SR 2 - 3	1/8	3/16	2.28	3.0	7/16	7/16	12.70	15.24	27.68	34.29
SR 2 - 4	1/8	1/16	2.28	4.4	7/16	7/16	12.70	15.24	29.46	36.06
SR 2 - 6	1/8	1/16	2.28	6.9	7/16	7/16	12.70	15.24	30.98	37.59
SR 2 - 8	1/8	1/2	2.28	9.4	9/16	7/16	12.70	15.24	37.59	44.19
SR 3 - 2	3/16	1/8	3.04	2.1	7/16	1/2	13.71	16.00	28.19	34.79
SR 3 - 4	3/16	1/4	3.04	4.4	7/16	1/2	13.71	16.00	30.48	37.08
SR 4 - 2	1/4	1/8	4.83	2.1	1/2	9/16	15.24	17.78	29.46	36.83
SR 4 - 3	1/4	3/16	4.83	3.0	1/2	9/16	15.24	17.78	30.22	37.59
SR 4 - 4	1/4	1/4	4.83	4.4	1/2	9/16	15.24	17.78	31.75	39.11
SR 4 - 5	1/4	5/16	4.83	5.6	1/2	9/16	15.24	17.78	32.51	39.87
SR 4 - 6	1/4	3/8	4.83	6.9	1/2	9/16	15.24	17.78	33.27	40.64
SR 4 - 8	1/4	1/2	4.83	9.4	9/16	9/16	15.24	17.78	38.86	46.22
SR 4 - 10	1/4	5/8	4.83	12.0	11/16	9/16	15.24	17.78	40.64	48.00
SR 4 - 12	1/4	3/4	4.83	14.8	13/16	9/16	15.24	17.78	41.40	47.75
SR 5 - 6	5/16	3/8	6.35	6.9	9/16	5/8	16.25	18.54	34.54	41.91
SR 5 - 8	5/16	1/2	6.35	9.4	9/16	5/8	16.25	18.54	40.13	47.49
SR 6 - 4	3/8	1/4	7.11	4.4	5/8	11/16	16.76	19.30	34.03	41.40
SR 6 - 6	3/8	3/8	7.11	6.9	5/8	11/16	16.76	19.30	35.81	43.18
SR 6 - 8	3/8	1/2	7.11	9.4	5/8	11/16	16.76	19.30	41.14	48.51
SR 6 - 10	3/8	5/8	7.11	12.0	11/16	11/16	16.76	19.30	42.92	50.29
SR 6 - 12	3/8	3/4	7.11	14.8	13/16	11/16	16.76	19.30	42.92	50.29
SR 8 - 4	1/2	1/4	10.41	4.4	13/16	7/8	22.86	21.84	34.79	44.95
SR 8 - 6	1/2	3/8	10.41	6.9	13/16	7/8	22.86	21.84	36.57	46.73
SR 8 - 8	1/2	1/2	10.41	9.4	13/16	7/8	22.86	21.84	42.16	52.32
SR 8 - 10	1/2	5/8	10.41	12.0	13/16	7/8	22.86	21.84	43.68	53.84
SR 8 - 12	1/2	3/4	10.41	14.8	13/16	7/8	22.86	21.84	43.68	53.84
SR 8 - 16	1/2	1	10.41	20.4	1-1/16	7/8	22.86	21.84	50.03	60.19
SR 10 - 12	5/8	3/4	12.70	14.8	15/16	1	24.38	21.84	44.45	54.61
SR 10 - 14	5/8	7/8	12.70	17.0	15/16	1	24.38	21.84	45.97	56.13
SR 10 - 16	5/8	1	12.70	20.4	1-1/16	1	24.38	21.84	50.80	60.96
SR 12 - 8	3/4	1/2	15.74	9.4	1-1/16	1-1/8	24.38	21.84	44.45	54.61
SR 12 - 16	3/4	1	15.74	20.4	1-1/16	1-1/8	24.38	21.84	52.32	62.48

* Fractional Tube to Metric **SUPERLOK** port are available upon request

SR Reducer

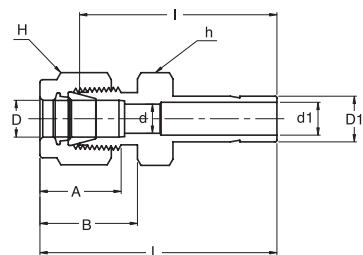


Connects Metric Tubes To Metric **SUPERLOK** Port

Part No.	Tube O.D.		d Min	d1 Min	Width Across Flat		A	B	I	L
	D	D1			h	H				
SR 3M - 4M	3	4	2.4	2.2	12	12	12.9	15.3	28.4	35.0
SR 3M - 6M	3	6	2.4	4.1	12	12	12.9	15.3	29.5	36.1
SR 3M - 10M	3	10	2.4	7.1	14	12	12.9	15.3	31.8	38.4
SR 4M - 6M	4	6	2.4	4.1	12	12	13.7	16.1	30.5	37.1
SR 6M - 3M	6	3	4.8	1.8	14	14	15.3	17.7	29.5	36.9
SR 6M - 8M	6	8	4.8	5.6	14	14	15.3	17.7	32.5	39.9
SR 6M - 10M	6	10	4.8	7.1	14	14	15.3	17.7	33.3	40.7
SR 6M - 12M	6	12	4.8	8.8	14	14	15.3	17.7	38.9	46.3
SR 8M - 6M	8	6	6.4	4.1	15	16	16.2	18.6	32.8	40.3
SR 8M - 10M	8	10	6.4	7.1	15	16	16.2	18.6	34.5	42.0
SR 8M - 12M	8	12	6.4	8.8	15	16	16.2	18.6	40.1	47.6
SR 10M - 6M	10	6	7.9	4.1	18	19	17.2	19.5	34.8	42.4
SR 10M - 8M	10	8	7.9	5.6	18	19	17.2	19.5	35.8	43.4
SR 10M - 12M	10	12	7.9	8.8	18	19	17.2	19.5	42.2	49.8
SR 10M - 15M	10	15	7.9	11.2	18	19	17.2	19.5	43.7	51.3
SR 10M - 18M	10	18	7.9	13.9	22	19	17.2	19.5	43.7	51.3
SR 12M - 6M	12	6	9.5	4.1	22	22	22.8	22.0	34.8	44.9
SR 12M - 8M	12	8	9.5	5.6	22	22	22.8	22.0	35.8	45.9
SR 12M - 10M	12	10	9.5	7.1	22	22	22.8	22.0	36.6	46.7
SR 12M - 16M	12	16	9.5	12.0	22	22	22.8	22.0	43.7	53.8
SR 12M - 18M	12	18	9.5	13.9	22	22	22.8	22.0	43.7	53.8
SR 12M - 20M	12	20	9.5	15.5	22	22	22.8	22.0	46.0	56.1
SR 12M - 22M	12	22	9.5	17.9	24	22	22.8	22.0	46.0	56.1
SR 12M - 25M	12	25	9.5	19.9	27	22	22.8	22.0	52.3	62.4
SR 16M - 12M	16	12	12.7	8.8	27	25	24.4	22.0	42.9	53.0
SR 18M - 12M	18	12	15.1	8.8	27	30	24.4	22.0	44.5	54.6
SR 18M - 16M	18	16	15.1	12.0	27	30	24.4	22.0	46.0	56.1
SR 18M - 20M	18	20	15.1	15.5	27	30	24.4	22.0	47.5	57.6
SR 18M - 22M	18	22	15.1	17.9	30	30	24.4	22.0	47.5	57.6
SR 18M - 25M	18	25	15.1	19.9	30	30	24.4	22.0	52.3	62.4
SR 20M - 16M	20	16	15.9	12.0	30	32	26.0	22.0	47.8	57.9
SR 20M - 18M	20	18	15.9	13.9	30	32	26.0	22.0	47.8	57.9
SR 20M - 22M	20	22	15.9	17.9	30	32	26.0	22.0	49.3	59.4
SR 20M - 25M	20	25	15.9	19.9	30	32	26.0	22.0	54.1	64.2
SR 22M - 18M	22	18	18.3	13.9	30	32	26.0	22.0	47.8	57.9
SR 22M - 20M	22	20	18.3	15.5	30	32	26.0	22.0	49.3	59.4
SR 22M - 25M	22	25	18.3	19.9	30	32	26.0	22.0	54.1	64.2
SR 25M - 18M	25	18	21.8	13.9	35	38	31.3	26.5	50.8	63.1
SR 25M - 20M	25	20	21.8	15.5	35	38	31.3	26.5	52.3	64.6

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SR Reducer

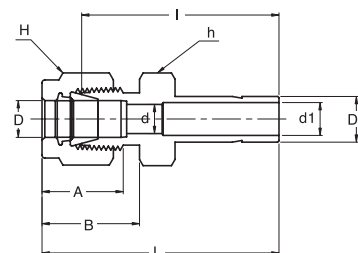

Connects Metric Tubes To Fractional SUPERLOK Port

Part No.	Tube O.D.		d Min	d1 Min	Width Across Flat		A	B	I	L
	D	D ₁ (inch)			h	H				
SR 3M - 2	3	1/8	2.4	2.1	12	12	12.9	15.3	26.9	33.5
SR 3M - 4	3	1/4	2.4	4.4	12	12	12.9	15.3	29.5	36.1
SR 6M - 4	6	1/4	4.8	4.4	14	14	15.3	17.7	31.8	39.2
SR 6M - 5	6	5/16	4.8	5.6	14	14	15.3	17.7	32.5	39.9
SR 6M - 6	6	3/8	4.8	6.9	14	14	15.3	17.7	33.3	40.7
SR 6M - 8	6	1/2	4.8	9.4	14	14	15.3	17.7	38.9	46.3
SR 8M - 6	8	3/8	6.4	6.9	15	16	16.2	18.6	34.5	42.0
SR 8M - 8	8	1/2	6.4	9.4	15	16	16.2	18.6	40.1	47.6
SR 10M - 6	10	3/8	7.9	6.9	18	19	17.2	19.5	36.6	44.2
SR 10M - 8	10	1/2	7.9	9.4	18	19	17.2	19.5	42.2	49.8
SR 12M - 8	12	1/2	9.5	9.4	22	22	22.8	22.0	42.2	52.3
SR 12M - 12	12	3/4	9.5	14.8	22	22	22.8	22.0	43.7	53.8
SR 18M - 12	18	3/4	15.1	14.8	27	30	24.4	22.0	46.0	56.1
SR 18M - 16	18	1	15.1	20.4	27	30	24.4	22.0	52.3	62.4


SBR Bulkhead Reducer

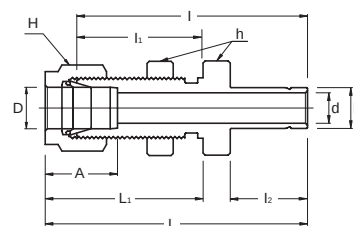

Connects Fractional Tubes To Fractional SUPERLOK Port

Part No.	Tube O.D. D (inch)	d Min	Width Across Flat		A	I	I ₁	I ₂	L	L ₁	Panel Hole Drill Size	Panel Max. Thickness
			h (inch)	H (inch)								
SBR 2 - 2	1/8	2.1	1/2	7/16	12.70	42.92	24.63	13.46	49.53	31.24	8.33	12.70
SBR 4 - 4	1/4	4.4	5/8	9/16	15.24	48.51	26.16	15.74	55.88	33.52	11.50	10.16
SBR 6 - 6	3/8	6.9	3/4	11/16	16.76	53.84	29.46	17.52	61.21	36.83	14.68	11.17
SBR 8 - 8	1/2	9.4	15/16	7/8	22.86	62.73	31.75	23.11	72.89	41.91	19.44	12.70
SBR 10 - 10	5/8	12.0	1-1/16	1	24.38	65.02	32.51	24.70	75.18	42.67	22.62	12.70
SBR 16 - 16	1	20.4	1-5/8	1-1/2	31.24	88.13	45.21	31.70	100.33	57.40	33.73	19.05

SMA Male Adapter



Connects Fractional **SUPERLOK** Port To Female NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d (Min)	d ₁	Width Across Flat h (inch)	I	L
SMA 2 - 2N	1/8	1/8	4.82	2.10	7/16	13.45	29.50
SMA 2 - 4N	1/8	1/4	7.11	2.10	9/16	13.45	34.80
SMA 3 - 2N	3/16	1/8	4.82	3.04	7/16	14.20	30.22
SMA 3 - 4N	3/16	1/4	7.11	3.04	9/16	14.20	35.56
SMA 4 - 2N	1/4	1/8	4.40	4.40	7/16	15.75	31.80
SMA 4 - 4N	1/4	1/4	4.40	4.40	9/16	15.75	37.08
SMA 4 - 6N	1/4	3/8	4.40	4.40	11/16	15.75	37.84
SMA 4 - 8N	1/4	1/2	4.40	4.40	7/8	15.75	43.43
SMA 5 - 2N	5/16	1/8	4.82	5.60	7/16	16.80	32.76
SMA 5 - 4N	5/16	1/4	6.35	5.60	9/16	16.80	38.10
SMA 6 - 2N	3/8	1/8	4.82	6.90	7/16	17.50	33.50
SMA 6 - 4N	3/8	1/4	6.90	6.90	9/16	17.50	38.90
SMA 6 - 6N	3/8	3/8	6.90	6.90	11/16	17.50	39.60
SMA 6 - 8N	3/8	1/2	6.90	6.90	7/8	17.50	45.20
SMA 8 - 4N	1/2	1/4	7.11	9.40	9/16	23.20	44.50
SMA 8 - 6N	1/2	3/8	9.40	9.40	11/16	23.20	45.20
SMA 8 - 8N	1/2	1/2	9.40	9.40	7/8	23.20	50.80
SMA 10 - 6N	5/8	3/8	9.90	12.00	11/16	24.70	47.40
SMA 10 - 8N	5/8	1/2	12.00	12.00	7/8	24.70	52.30
SMA 10 - 12N	5/8	3/4	14.98	12.00	1-1/16	24.70	52.30
SMA 12 - 8N	3/4	1/2	11.94	14.80	7/8	24.70	52.30
SMA 12 - 12N	3/4	3/4	14.80	14.80	1-1/16	24.70	52.30
SMA 12 - 16N	3/4	1	20.32	14.80	1-3/8	24.70	57.91
SMA 14 - 12N	7/8	3/4	14.98	17.27	1-1/16	26.70	54.30
SMA 16 - 12N	1	3/4	15.74	20.40	1-1/16	31.70	58.70
SMA 16 - 16N	1	1	20.40	20.40	1-3/8	31.70	66.00

* ISO Tapered Threads are available upon request


Connects Metric **SUPERLOK** Port To Female NPT Thread

Part No.	Tube O.D. (D)	T* (NPT)	d (Min)	d ₁	Width Across Flat (h)	I	L
SMA 6M - 2N	6	1/8	4.1	4.1	12	15.75	32.8
SMA 6M - 4N	6	1/4	4.1	4.1	14	15.75	38.1
SMA 8M - 4N	8	1/4	5.6	5.6	14	16.50	39.1
SMA 10M - 4N	10	1/4	7.1	7.1	14	17.50	39.9
SMA 10M - 6N	10	3/8	7.1	7.1	18	17.50	40.6
SMA 10M - 8N	10	1/2	11.9	7.1	22	17.50	46.2
SMA 12M - 4N	12	1/4	7.1	8.8	16	23.50	46.5
SMA 12M - 8N	12	1/2	11.9	8.8	22	23.50	52.0
SMA 18M - 12N	18	3/4	15.9	13.9	27	24.90	54.8

* ISO Tapered Threads are available upon request

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SFA Female Adapter



Connects Fractional **SUPERLOK** Port To Male NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d (Min)	Width Across Flat h (inch)	I	L
SFA 2 - 2N	1/8	1/8	2.10	9/16	13.45	31.50
SFA 2 - 4N	1/8	1/4	2.10	3/4	13.45	35.30
SFA 3 - 2N	3/16	1/8	3.04	9/16	14.20	32.00
SFA 3 - 4N	3/16	1/4	3.04	3/4	14.20	35.81
SFA 4 - 2N	1/4	1/8	4.40	9/16	15.75	33.02
SFA 4 - 4N	1/4	1/4	4.40	3/4	15.75	37.10
SFA 4 - 6N	1/4	3/8	4.40	7/8	15.75	39.37
SFA 4 - 8N	1/4	1/2	4.40	1-1/16	15.75	45.50
SFA 5 - 2N	5/16	1/8	5.60	9/16	16.80	34.29
SFA 5 - 4N	5/16	1/4	5.60	3/4	16.80	37.59
SFA 6 - 2N	3/8	1/8	6.90	9/16	17.50	34.29
SFA 6 - 4N	3/8	1/4	6.90	3/4	17.50	38.10
SFA 6 - 6N	3/8	3/8	6.90	7/8	17.50	40.38
SFA 6 - 8N	3/8	1/2	6.90	1-1/16	17.50	46.73
SFA 8 - 4N	1/2	1/4	9.40	3/4	23.20	43.43
SFA 8 - 6N	1/2	3/8	9.40	7/8	23.20	45.46
SFA 8 - 8N	1/2	1/2	9.40	1-1/16	23.20	51.80
SFA 10 - 6N	5/8	3/8	12.00	7/8	24.70	48.26
SFA 10 - 8N	5/8	1/2	12.00	1-1/16	24.70	53.08
SFA 12 - 8N	3/4	1/2	14.80	1-1/16	24.70	52.83
SFA 12 - 12N	3/4	3/4	14.80	1-5/16	24.70	54.86
SFA 12 - 16N	3/4	1	14.80	1-5/8	24.70	58.42
SFA 14 - 12N	7/8	3/4	17.27	1-5/16	26.70	57.15
SFA 16 - 12N	1	3/4	20.40	1-5/16	31.70	60.70
SFA 16 - 16N	1	1	20.40	1-5/8	31.70	64.26

* ISO Tapered Threads are available upon request


Connects Metric **SUPERLOK** Port To Male NPT Thread

Part No.	Tube O.D. (D)	T* (NPT)	d (Min)	Width Across Flat (h)	I	L
SFA 3M - 2N	3	1/8	1.8	14	13.15	31.2
SFA 6M - 2N	6	1/8	4.1	14	15.75	32.5
SFA 6M - 4N	6	1/4	4.1	19	15.75	37.1
SFA 8M - 4N	8	1/4	5.6	19	16.50	37.6
SFA 10M - 4N	10	1/4	7.1	19	17.50	38.1
SFA 10M - 6N	10	3/8	7.1	22	17.50	40.1
SFA 10M - 8N	10	1/2	7.1	27	17.50	46.5
SFA 12M - 4N	12	1/4	8.8	19	23.50	43.7
SFA 12M - 6N	12	3/8	8.8	22	23.50	46.0
SFA 12M - 8N	12	1/2	8.8	27	23.50	52.3
SFA 18M - 12N	18	3/4	13.9	32	24.90	54.8

* ISO Tapered Threads are available upon request

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SUPERLOK Adapter Solve Alignment Problems

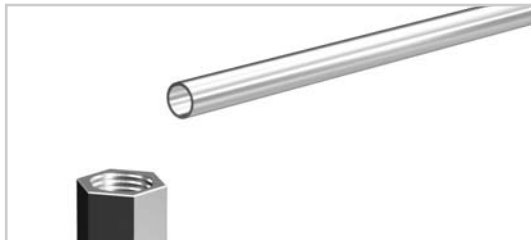

1. Required installation is to connect tubing in direction shown, to a female port.



3. To connect this situation, merely tighten pipe thread of male adapter into female port.

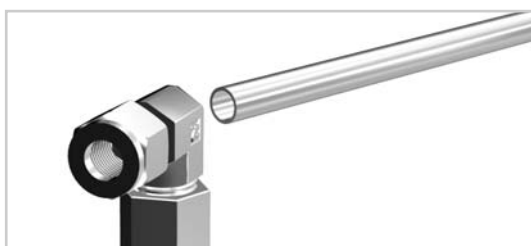


2. With pipe connection tight, the male elbow is pointing in the wrong direction for desired tubing run.



4. Connect union elbow to adapter by tightening SUPERLOK connection with wrench while holding elbow pointing in desired direction. Then insert tubing into the other end of the Union Elbow and connect tubing.

SPC Port Connector



Connects Fractional SUPERLOK Ports


Part No.	Tube O.D.(D) (inch)	d (Min)	E	I	L
SPC - 2	1/8	2.1	6.09	15.75	22.35
SPC - 4	1/4	4.4	9.39	18.79	24.63
SPC - 5	5/16	5.6	10.92	20.06	25.90
SPC - 6	3/8	6.9	12.70	20.32	26.16
SPC - 8	1/2	9.4	15.74	25.90	35.81
SPC - 12	3/4	14.8	22.09	27.68	37.33
SPC - 16	1	20.4	28.44	34.54	48.00

Connects Metric SUPERLOK Ports

Part No.	Tube O.D. (D)	d (Min)	E	I	L
SPC - 3M	3	1.9	6.0	15.7	22.2
SPC - 6M	6	4.1	9.0	18.7	24.6
SPC - 8M	8	5.6	11.0	20.0	25.9
SPC - 10M	10	7.1	13.1	20.2	26.1
SPC - 12M	12	8.8	15.0	26.0	35.8
SPC - 16M	16	12.0	19.0	27.6	37.4

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SRPC Reducing Port Connector



Connects Fractional **SUPERLOK** Port To Male AN

Part No.	Tube O.D. D ₁ (inch)	Reduced Tube O.D. D (inch)	d	E	I	l ₁	L
SRPC 2 - 1	1/8	1/16	0.76	6.09	8.63	2.03	17.27
SRPC 4 - 1	1/4	1/16	0.76	9.39	8.63	3.55	18.03
SRPC 4 - 2	1/4	1/8	2.10	9.39	13.46	3.30	22.60
SRPC 6 - 2	3/8	1/8	2.10	12.70	13.46	3.81	23.11
SRPC 6 - 4	3/8	1/4	4.40	12.70	15.74	3.30	24.89
SRPC 8 - 4	1/2	1/4	4.40	15.74	15.74	3.81	29.21
SRPC 8 - 6	1/2	3/8	6.90	15.74	17.52	3.30	30.48
SRPC 12 - 8	3/4	1/2	9.40	22.09	24.38	3.81	37.84
SRPC 16 - 8	1	1/2	9.40	28.44	24.38	4.82	42.67
SRPC 16 - 12	1	3/4	14.80	28.44	25.90	4.06	43.43


Installation Instructions Port Connector

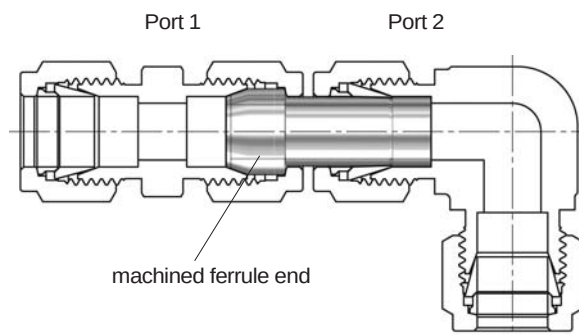

- Remove nut and ferrules from the first of two SUPERLOK ports to be connected.
- Slip nut (no ferrules) over machined ferrule end of port connector.
- Insert port connector into SUPERLOK port 1 and snug by hand.
Tighten with wrench 1/4 turn only. For 1/8, 3/16 in., 2, 3, and 4mm tube fittings, tighten only 1/8 turn.
Subsequent connections are made by tightening slightly with a wrench after snugging the nut by hand.
- Insert other end of port connector into SUPERLOK port 2 and tighten nut 1 1/4 turns from finger-tight.
For 1/16, 1/8, 3/16 in., 2, 3, and 4mm tube fittings, only 3/4 turn from finger-tight is necessary.

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SFTC Lap Joint Flange Tubes Connector




Connects Fractional Tubes

Part No.	Tube Size (inch)	Flange Seat	Dimensions									
			A	B	L ₁	L	I	h (inch)	H (inch)	D	D ₁	d (Min)
SFTC 4 - SM	1/4	SM	80.8	8.9	56.5	74.9	6.5	11/16	9/16	34.5	21.1	4.8
SFTC 4 - SR	1/4	SR	80.8	8.9	56.5	74.9	6.5	11/16	9/16	34.5	21.1	4.8
SFTC 6 - SM	3/8	SM	82.3	8.9	56.5	74.9	6.5	11/16	11/16	34.5	21.1	7.1
SFTC 6 - SR	3/8	SR	82.3	8.9	56.5	74.9	6.5	11/16	11/16	34.5	21.1	7.1
SFTC 8 - SM	1/2	SM	85.1	8.9	56.5	74.9	6.5	3/4	7/8	34.5	21.1	10.4
SFTC 8 - SR	1/2	SR	85.1	8.9	56.5	74.9	6.5	3/4	7/8	34.5	21.1	10.4

Lap joint flange tube connector provides easy joint between process lines and instruments designed for use with 1/2in Lap joint flanges to ANSI B 16.5 or BS 1560

Flange Seal Finish

Two surface finishes, smooth or serrated, are available on the sealing surface of the stub end.




Smooth
Identifier : SM
Ra 3.2 ~ 6.3
micrometer



Serrated
Identifier : SR
Ra 6.3 ~ 12.5
micrometer

*Note : GROOVE identifies serrated surface finish

SAF An Flare




Connects Fractional SUPERLOK Port To Male AN

Part No.	Tube O.D. D (inch)	AN Tube Flare Size (inch)	Straight Thread T (U)	Width Across Flat		A	I	L
				h (inch)	H (inch)			
SAF2 - 2U	1/8	1/8	5/16-24	3/8	7/16	13.71	13.46	18.54
SAF2 - 4U	1/8	1/4	7/16-20	9/16	7/16	15.74	13.46	19.05
SAF4 - 4U	1/4	1/4	7/16-20	9/16	9/16	15.74	15.74	21.33
SAF6 - 6U	3/8	3/8	9/16-18	11/16	11/16	18.28	17.52	24.89
SAF8 - 8U	1/2	1/2	3/4-16	7/8	7/8	21.59	23.11	31.75

•All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SAU An Union



Connects Fractional Tubes To An Flared Tubes

Part No.	Tube O.D. D (inch)	AN Tube Flare Size (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	L
					h (inch)	H (inch)				
SAU 2 - 2U	1/8	1/8	5/16-24	1.52	7/16	7/16	12.70	15.24	25.65	32.25
SAU 2 - 4U	1/8	1/4	7/16-20	2.28	1/2	7/16	12.70	15.24	28.44	35.05
SAU 4 - 4U	1/4	1/4	7/16-20	4.31	1/2	9/16	15.24	17.78	30.22	37.59
SAU 5 - 5U	5/16	5/16	1/2-20	5.84	9/16	5/8	16.25	18.54	30.98	38.35
SAU 6 - 4U	3/8	1/4	7/16-20	4.31	5/8	11/16	16.76	19.30	32.25	39.62
SAU 6 - 6U	3/8	3/8	9/16-18	7.11	5/8	11/16	16.76	19.30	32.25	39.62
SAU 8 - 8U	1/2	1/2	3/4-16	9.90	13/16	7/8	22.86	21.84	35.81	45.97
SAU 12 - 12U	3/4	3/4	1-1/16-12	15.49	1-1/8	1-1/8	24.38	21.84	43.18	53.34
SAU 16 - 16U	1	1	1-5/16-12	21.33	1-3/8	1-1/2	31.24	26.41	49.27	61.46


SAA An Adapter

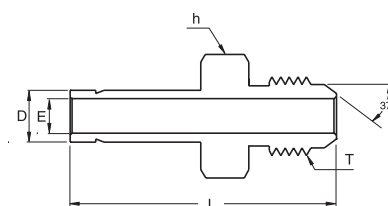

Connects Fractional **SUPERLOK** Port To AN Flared Tubes

Part No.	Tube O.D. D (inch)	AN Tube Flare Size (inch)	Straight Thread T (U)	Width Across Flat h (inch)	E	L
SAA 4 - 4U	1/4	1/4	7/16-20	1/2	4.40	37.08
SAA 6 - 4U	3/8	1/4	7/16-20	1/2	6.90	38.86
SAA 6 - 6U	3/8	3/8	9/16-18	5/8	6.90	39.62
SAA 8 - 8U	1/2	1/2	3/4-16	13/16	9.40	48.51
SAA 12 - 12U	3/4	3/4	1-1/16-12	1-1/8	14.80	56.13
SAA 16 - 16U	1	1	1-5/16-12	1-3/8	20.40	65.53


SOSC O-Seal Straight Thread Connector



Connects Fractional Tube To Female Straight Thread

Part No.	Tube O.D. D (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SOSC 2 - 2U	1/8	5/16-24	2.28	9/16	7/16	12.70	15.24	26.16	8.63	32.76	-011
SOSC 3 - 3U	3/16	3/8-24	3.05	5/8	1/2	13.71	16.00	27.68	9.65	34.29	-012
SOSC 4 - 4U	1/4	7/16-20	4.82	3/4	9/16	15.24	17.78	30.98	10.41	38.35	-111
SOSC 5 - 5U	5/16	1/2-20	6.35	7/8	5/8	16.25	18.54	33.27	11.17	40.64	-112
SOSC 6 - 6U	3/8	9/16-18	7.11	15/16	11/16	16.76	19.30	35.05	11.93	42.41	-114
SOSC 8 - 8U	1/2	3/4-16	10.41	1-1/8	7/8	22.86	21.84	35.81	11.93	45.97	-116
SOSC 12 - 12U	3/4	1-1/16-12	15.75	1-1/2	1-1/8	24.38	21.84	42.16	14.22	52.32	-215
SOSC 16 - 16U	1	1-5/16-12	22.35	1-3/4	1-1/2	31.24	26.41	45.97	14.22	58.16	-219

SOPC O-Seal Pipe Thread Connector




Connects Fractional Tube To Female NPT Thread

Part No.	Tube O.D. D (inch)	T* (NPT)	d Min	Width Across Flat		A	B	I	I ₁	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SOPC 2 - 2N	1/8	1/8	2.28	3/4	7/16	12.70	15.24	26.16	7.11	32.76	-111
SOPC 4 - 2N	1/4	1/8	4.82	3/4	9/16	15.24	17.78	27.68	7.11	35.05	-111
SOPC 4 - 4N	1/4	1/4	4.82	15/16	9/16	15.24	17.78	30.98	9.65	38.35	-113
SOPC 6 - 4N	3/8	1/4	7.11	15/16	11/16	16.76	19.30	32.51	9.65	39.87	-113
SOPC 6 - 6N	3/8	3/8	7.11	1-1/8	11/16	16.76	19.30	34.03	10.41	41.40	-116
SOPC 6 - 8N	3/8	1/2	7.11	1-5/16	11/16	16.76	19.30	39.62	13.46	46.99	-212
SOPC 8 - 8N	1/2	1/2	10.41	1-5/16	7/8	22.86	21.84	39.62	13.46	49.78	-212

*All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SSMC SAE/MS Male Connector



Connects Fractional Tubes To SAE/MS Straight Thread Boss

Part No.	Tube O.D. D (inch)	Straight Thread T (U)	d Min	Width Across Flat		A	B	I	h	L	O-Ring Uniform Size Number
				h (inch)	H (inch)						
SSMC 2 - 2U	1/8	5/16-24	2.28	7/16	7/16	12.70	15.24	23.36	7.62	29.97	3-902
SSMC 4 - 4U	1/4	7/16-20	4.82	9/16	9/16	15.24	17.78	26.67	9.14	34.03	3-904
SSMC 4 - 6U	1/4	9/16-18	4.82	11/16	9/16	15.24	17.78	28.19	9.90	35.56	3-906
SSMC 4 - 8U	1/4	3/4-16	4.82	7/8	9/16	15.24	17.78	30.22	11.17	37.59	3-908
SSMC 4 - 10U	1/4	7/8-14	4.82	1	9/16	15.24	17.78	33.27	12.70	40.64	3-910
SSMC 5 - 5U	5/16	1/2-20	6.35	5/8	5/8	16.25	18.54	27.43	9.14	34.79	3-905
SSMC 6 - 4U	3/8	7/16-20	5.08	5/8	11/16	16.76	19.30	28.19	9.14	35.56	3-904
SSMC 6 - 6U	3/8	9/16-18	7.11	11/16	11/16	16.76	19.30	29.71	9.90	37.08	3-906
SSMC 6 - 8U	3/8	3/4-16	7.11	7/8	11/16	16.76	19.30	31.75	11.17	39.11	3-908
SSMC 6 - 10U	3/8	7/8-14	7.11	1	11/16	16.76	19.30	34.79	12.70	42.16	3-910
SSMC 8 - 6U	1/2	9/16-18	7.11	13/16	7/8	22.86	21.84	28.95	9.90	39.11	3-906
SSMC 8 - 8U	1/2	3/4-16	10.41	7/8	7/8	22.86	21.84	31.75	11.17	41.91	3-908
SSMC 8 - 10U	1/2	7/8-14	10.41	1	7/8	22.86	21.84	34.79	12.70	44.95	3-910
SSMC 8 - 12U	1/2	1-1/16-12	10.41	1-1/4	7/8	22.86	21.84	38.86	14.98	49.02	3-912
SSMC 10 - 8U	5/8	3/4-16	10.66	15/16	1	24.38	21.84	31.75	11.17	41.91	3-908
SSMC 10 - 10U	5/8	7/8-14	12.70	1	1	24.38	21.84	35.05	12.70	45.21	3-910
SSMC 12 - 8U	3/4	3/4-16	10.66	1-1/16	1-1/8	24.38	21.84	35.81	11.17	45.97	3-908
SSMC 12 - 12U	3/4	1-1/16-12	15.74	1-1/4	1-1/8	24.38	21.84	38.86	14.98	49.02	3-912
SSMC 14 - 14U	7/8	1-3/16-12	18.28	1-3/8	1-1/4	25.90	21.84	38.86	14.98	49.02	3-914
SSMC 16 - 12U	1	1-1/16-12	16.76	1-3/8	1-1/2	31.24	26.41	41.14	14.98	53.34	3-912
SSMC 16 - 16U	1	1-5/16-12	22.35	1-1/2	1-1/2	31.24	26.41	42.16	14.98	54.35	3-916

Mounting Dimensions for O-Seal Connectors




Figure 1




Figure 2




Figure 3

*ALLOW CLEARANCE FOR FULL THREAD

■ Installation Instruction

In order to prevent the leakage with SUPERLOK O-Seal Fittings, the surface perpendicular to the axis of the thread should be flat. When installing an O-Seal fitting, turn it until finger-tight. (The squeeze on O-Ring can be felt during the last 1/4 turn). After finger-tight installation, snug lightly with a wrench.

When connecting the tubing to the SUPERLOK connector, always use a back-up wrench on the O-Seal fitting hex so it does not turn while the nut is being tightened. Also use a back-up wrench when disconnecting a tubing connection.

For a raised surface, such as Figure 1, it is recommended that the flat surface have a diameter at least as large as dimension "A" for the various size O-Seal fittings. This diameter is sufficient to allow metal-to-metal contact outside of the O-Ring sealing diameter and to prevent O-Ring extrusion at high pressure.

Figure 2 is an O-Seal fitting using with a counter bored or recessed hole. In this case, the diameter "B" is sufficient to allow the round shoulder of the O-seal to clear for proper installation. "D" gives the maximum depth that can be used with this diameter.

Figure 3 shows the usage at deeper grooved or concaved area and "E" is the maximum depth that will allow a thin wrench (1/8") to hold the O-Seal fitting while the SUPERLOK connection is made to the tubing. The diameter "C" is sufficient to allow the hex of the fitting to turn in the recessed hole.

Basic Ordering Number	Straight Thread	Pipe Thread	A Min. Dia.	B Min. Dia.	C Min. Dia.	D Min. Dia.	E Min. Dia.
SOSC 1 - 2U	5/16-24	-	12.7	15.0	16.8	2.3	4.1
SOSC 2 - 2U	5/16-24	-	12.7	15.0	16.8	2.3	5.6
SOPC 2 - 2N	-	1/8 NPT	17.5	19.8	22.4	4.1	7.1
SOSC 3 - 3U	3/8-24	-	14.2	16.8	19.1	2.3	5.6
SOSC 4 - 4U	7/16-20	-	17.5	19.8	22.4	4.1	7.1
SOPC 4 - 2N	-	1/8 NPT	17.5	19.8	22.4	4.1	7.1
SOPC 4 - 4N	-	1/4 NPT	22.1	24.6	27.7	4.1	7.9
SOSC 5 - 5U	1/2-20	-	19.1	23.1	26.2	4.1	7.9
SOSC 6 - 6U	9/16-18	-	20.6	24.6	27.7	4.1	7.9
SOPC 6 - 4N	-	1/4 NPT	22.1	24.6	27.7	4.1	7.9
SOPC 6 - 6N	-	3/8 NPT	25.4	29.5	33.3	4.1	8.6
SOPC 6 - 8N	-	1/2 NPT	31.0	34.0	38.9	5.6	11.2
SOSC 8 - 8U	3/4-16	-	25.4	29.5	33.3	4.1	8.6
SOPC 8 - 8N	-	1/2 NPT	31.0	34.0	38.9	5.6	11.2
SOSC 12 - 12U	1-1/16-12	-	35.8	38.9	44.5	5.6	12.7
SOSC 16 - 16U	1-5/16-12	-	42.9	45.2	51.6	5.6	14.2

Dimensions are for reference only and are subject to change.

•All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

SAE/MS Straight Thread Positionable Elbows and Tees


Installation instructions

1. Lubricate O-Ring with the lubricant which is applicable for the system fluid, environment and O-Ring material. (Standard O-Ring materials is viton. Other O-Ring materials are also available).
2. Turn the fittings into the straight thread boss until the metal back-up washer contacts the face of the boss. At this moment, O-Ring gets into inclined groove.
3. Until SUPERLOK's end is oriented in the proper direction, position the fittings by turning to counter clockwise. (no more than 1 turning)
4. Until the washer contacts to the face of the bosses, tighten the fittings with wrench and back-up wrench.



※ Note: SAE/MS's POSITIONABLE TEE and ELBOWS shall be compatible with SAE J1926, MS16142, or O-Ring female straight thread for JIS boss.

SAE/MS Internal Straight Thread Boss

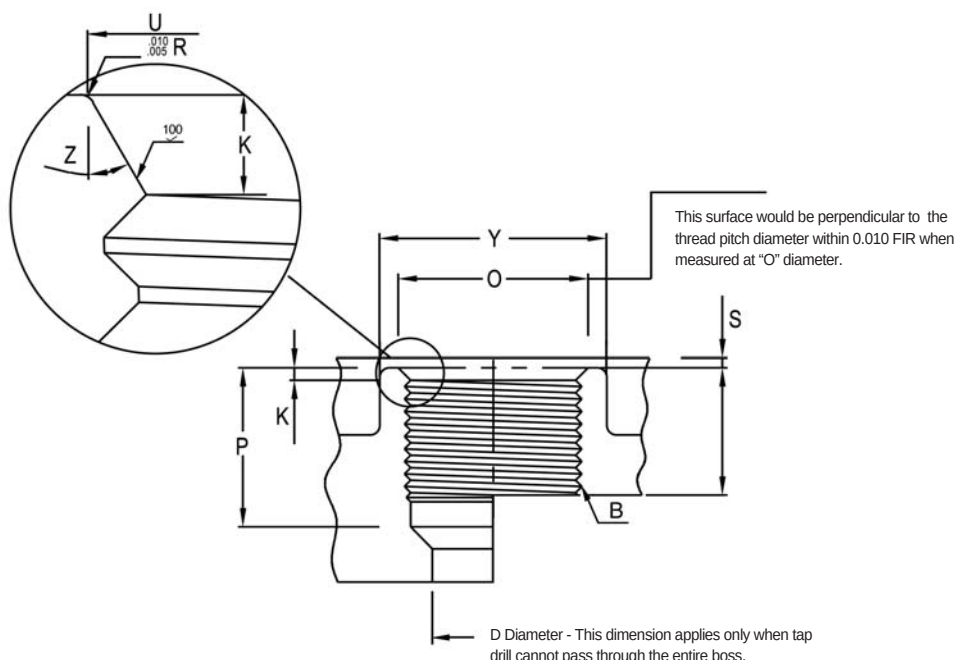

- O : This surface would be perpendicular to the thread pitch diameter within 0.010 FIR when measured at "O" diameter.
- D : This dimension applies only when tap drill cannot pass through the entire boss.

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

Data for SAE/MS Straight Thread Boss

B / Straight Thread						D Dia	Full Thread Depth	K	O Dia	P ¹	S ²	U Dia	Y ³ Dia	Z
Nom. Tube.O.D	Thread Size	Pitch Dia		Minor Dia										
		Min	Max	Min	Max	Min	Min	+0.015 -0.000	Min	Min	Min	Max		±1 Deg
1/8	5/16 - 24	0.2854	0.2902	0.267	0.277	0.062	0.390	0.074	0.438	0.468	0.062	0.358	0.672	12
3/16	3/8 - 24	0.3479	0.3528	0.330	0.340	0.125	0.390	0.074	0.500	0.468	0.062	0.421	0.750	12
1/4	7/16 - 20	0.4050	0.4104	0.383	0.395	0.172	0.454	0.093	0.563	0.547	0.062	0.487	0.828	12
5/16	1/2 - 20	0.4675	0.4731	0.446	0.457	0.234	0.454	0.093	0.625	0.547	0.062	0.550	0.906	12
3/8	9/16 - 18	0.5624	0.5323	0.502	0.515	0.297	0.500	0.097	0.688	0.609	0.062	0.616	0.969	12
1/2	3/4 - 16	0.7094	0.7159	0.682	0.696	0.391	0.562	0.100	0.875	0.688	0.094	0.811	1.188	15
5/8	7/8 - 14	0.8286	0.8356	0.798	0.614	0.484	0.656	0.100	1.000	0.781	0.094	0.942	1.344	15
3/4	1 1/16 - 12	1.0084	1.0158	0.972	0.990	0.609	0.750	1.130	1.250	0.906	0.094	1.148	1.625	15
7/8	1 3/16 - 12	1.1334	1.1409	1.097	1.115	0.719	0.750	1.130	1.375	0.906	0.094	1.273	1.765	15
1	1 5/16 - 12	1.2584	1.2659	1.222	1.240	0.844	0.750	0.130	1.500	0.906	0.125	1.398	1.910	15
1 1/4	1 5/8 - 12	1.5709	1.5785	1.535	1.553	1.078	0.750	0.132	1.875	0.906	0.125	1.713	2.270	15
1 1/2	1 7/8 - 12	1.8209	1.8287	1.785	1.803	1.312	0.750	0.132	2.125	0.906	0.125	1.962	2.560	15
2	2 1/2 - 12	2.4459	2.4540	2.410	2.428	1.781	0.750	0.132	2.750	0.906	0.125	2.587	3.480	15

- ¹ Diameter U shall be concentric with thread pitch diameter within 0.005 full indicator reading (FIR) and shall be free from longitudinal and spiral tool marks. Annular tool marks shall be less than 100micro inches.
- ² This is the maximum recommended spotface depth to permit sufficient wrench grip for proper tightening of the fitting or locknut
- ³ If the surface of boss surface is machined, dimensions Y and S does not need to be applied.
- ⁴ Bottoming tap shall be used to satisfy the tap drill depth. Where standard taps are used, the drill depths must be increased accordingly

O-Ring for SAE/MS Fittings Bosses

Thread size	Inside Dimension (mm)	Cross Section (mm)	O-Ring Size No.	Thread size	Inside Dimension (mm)	Cross Section (mm)	O-Ring Size No.
5/16-24	6.07	1.63	3-902	3/4-16	16.36	2.21	3-908
3/8-24	7.65	1.63	3-903	7/8-14	19.18	2.46	3-910
7/16-20	8.92	1.83	3-904	1-1/16-12	23.47	2.95	3-912
1/2-20	10.52	1.83	3-905	1-3/16-12	26.59	2.95	3-914
9/16-18	11.89	1.98	3-906	1-5/16-12	29.74	2.95	3-916


• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

Weld End, Plug & Cap, Spare Part

WELD END	
SPWC Male Pipe Weld Connector page 66	
SMPWE Male Pipe Weld Elbow page 67	
SSWC Socket Weld Connector page 67	
SSWE Socket Weld Elbow page 67	
PLUG & CAP	
SP Plug page 68	
SC Cap page 68	
SPARE PART	
SN Nut page 69	
SFF Front Ferrule page 69	
SBF Back Ferrule page 70	
SFS Ferrule Set page 70	
SI Insert page 70	
SBR Bulkhead Retainer page 71	
SVP Vent Protector page 71	



SPWC Male Pipe Weld Connector



Connects Fractional Tubes To Pipe

Part No.	Tube O.D. D (inch)	Male Pipe Size P		d Min	Width Across Flat		A	B	I	I ₁	L
		Nom.	O.D.		h (inch)	H (inch)					
SPWC 2 - 2P	1/8	1/8	10.30	2.28	7/16	7/16	12.70	15.24	23.87	9.65	30.48
SPWC 3 - 2P	3/16	1/8	10.30	3.04	7/16	1/2	13.71	16.00	24.63	9.65	31.24
SPWC 4 - 2P	1/4	1/8	10.30	4.82	1/2	9/16	15.24	17.78	25.40	9.65	32.76
SPWC 4 - 4P	1/4	1/4	13.70	4.82	9/16	9/16	15.24	17.78	30.48	14.22	37.84
SPWC 5 - 2P	5/16	1/8	10.30	5.08	9/16	5/8	16.25	18.54	26.67	9.65	34.03
SPWC 5 - 4P	5/16	1/4	13.70	6.35	9/16	5/8	16.25	18.54	31.24	14.22	38.60
SPWC 6 - 4P	3/8	1/4	13.70	7.11	5/8	11/16	16.76	19.30	32.51	14.22	39.87
SPWC 6 - 6P	3/8	3/8	17.10	7.11	11/16	11/16	16.76	19.30	32.51	14.22	39.87
SPWC 6 - 8P	3/8	1/2	21.30	7.11	7/8	11/16	16.76	19.30	38.86	19.05	46.22
SPWC 8 - 6P	1/2	3/8	17.10	10.41	13/16	7/8	22.86	21.84	33.27	14.22	43.43
SPWC 8 - 8P	1/2	1/2	21.30	10.41	7/8	7/8	22.86	21.84	38.86	19.05	49.02
SPWC 8 - 12P	1/2	3/4	26.67	10.41	1-1/16	7/8	22.86	21.84	40.38	19.05	50.54
SPWC 10 - 8P	5/8	1/2	21.30	12.70	15/16	1	24.38	21.84	38.86	19.05	49.02
SPWC 12 - 12P	3/4	3/4	26.67	15.74	1-1/16	1-1/8	24.38	21.84	40.38	19.05	50.54
SPWC 16 - 16P	1	1	33.40	22.35	1-3/8	1-1/2	31.24	26.41	50.03	23.87	62.23

Connects Metric Tubes To Pipe

Part No.	Tube O.D. D	Male Pipe Size P		d Min	Width Across Flat		A	B	I	I ₁	L
		Nom.	O.D.		h	H					
SPWC 3M - 2P	3	1/8	10.3	2.4	12	12	12.9	15.3	23.9	9.7	30.5
SPWC 4M - 2P	4	1/8	10.3	2.4	12	12	13.7	16.1	24.6	9.7	31.2
SPWC 6M - 2P	6	1/8	10.3	4.8	14	14	15.3	17.7	25.4	9.7	32.8
SPWC 6M - 4P	6	1/4	13.7	4.8	14	14	15.3	17.7	30.5	14.2	37.9
SPWC 8M - 2P	8	1/8	10.3	5.1	15	16	16.2	18.6	26.7	9.7	34.2
SPWC 8M - 4P	8	1/4	13.7	6.4	15	16	16.2	18.6	31.2	14.2	38.7
SPWC 8M - 8P	8	1/2	21.3	6.4	22	16	16.2	18.6	38.1	19.0	45.6
SPWC 10M - 4P	10	1/4	13.7	7.1	18	19	17.2	19.5	33.3	14.2	40.9
SPWC 10M - 6P	10	3/8	17.1	7.9	18	19	17.2	19.5	33.3	14.2	40.9
SPWC 10M - 8P	10	1/2	21.3	7.9	22	19	17.2	19.5	38.9	19.0	46.5
SPWC 12M - 4P	12	1/4	13.7	7.1	22	22	22.8	22.0	33.3	14.2	43.4
SPWC 12M - 6P	12	3/8	17.1	9.5	22	22	22.8	22.0	33.3	14.2	43.4
SPWC 12M - 8P	12	1/2	21.3	9.5	22	22	22.8	22.0	38.9	19.0	49.0
SPWC 15M - 8P	15	1/2	21.3	11.9	24	25	24.4	22.0	38.9	19.0	49.0
SPWC 16M - 8P	16	1/2	21.3	12.7	24	25	24.4	22.0	38.9	19.0	49.0
SPWC 18M - 8P	18	1/2	21.3	13.5	27	30	24.4	22.0	40.4	19.0	50.5


Note : **SUPERLOK** weld ends are constructed per schedule 80 wall thickness or greater. Weld End : ANSI B31.1 and B31.3

Weld end **SUPERLOK** Usage Informations :

- Do weld after removing nut and ferrules from body to protect them from weld heat.
- Do protect thread end or pot and seat area of **SUPERLOK** body with another nut and plug.(for easy disassembly just finger tighten it)
- Correct weld procedure is required during welding and after weld completion. suitable heat treatment must be carried out in accordance with industry or your own standard.

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SMPWE Male Pipe Weld Elbow



Connects Fractional Tubes To Pipe

Part No.	Tube O.D. D (inch)	Pipe Size (P)		d Min	Width Across Flat		A	B	I	I ₁	L	L ₁
		Nom.	O.D		h (inch)	H (inch)						
SMPWE 4 - 4P	1/4	1/4	13.70	4.82	1/2	9/16	15.24	17.78	19.55	14.22	26.90	23.37
SMPWE 6 - 4P	3/8	1/4	13.70	7.11	5/8	11/16	16.76	19.30	23.11	14.22	30.48	25.40
SMPWE 8 - 8P	1/2	1/2	21.30	10.41	13/16	7/8	22.86	21.84	25.90	19.05	36.06	33.02


SSWC Socket Weld Connector



Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h (inch)	H (inch)						
SSWC - 2	1/8	2.28	7.87	7/16	7/16	12.70	15.24	22.35	6.35	28.95	8.63
SSWC - 4	1/4	4.82	11.17	1/2	9/16	15.24	17.78	26.16	7.87	33.52	10.41
SSWC - 6	3/8	7.11	15.74	5/8	11/16	16.76	19.30	30.22	9.65	37.59	11.93
SSWC - 8	1/2	10.41	19.05	13/16	7/8	22.86	21.84	30.98	12.70	41.14	11.93
SSWC - 12	3/4	15.74	26.67	1-1/16	1-1/8	24.38	21.84	33.27	14.22	43.43	11.93
SSWC - 16	1	22.35	33.27	1-3/8	1-1/2	31.24	26.41	40.38	19.05	52.57	14.22


SSWE Socket Weld Elbow



Connects Fractional Tubes

Part No.	Tube O.D. D (inch)	d Min	P	Width Across Flat		A	B	I	I ₁	L	L ₁
				h (inch)	H (inch)						
SSWE - 4	1/4	4.82	12.70	1/2	9/16	15.24	17.78	19.55	7.87	26.92	19.55
SSWE - 6	3/8	7.11	15.75	5/8	11/16	16.76	19.30	23.11	9.65	30.48	23.11
SSWE - 8	1/2	10.41	20.57	13/16	7/8	22.86	21.84	25.90	12.70	36.06	25.90
SSWE - 12	3/4	15.74	26.92	1-1/16	1-1/8	24.38	21.84	29.71	14.22	39.87	29.71
SSWE - 16	1	22.35	35.05	1-3/8	1-1/2	31.24	26.41	36.83	19.05	49.02	36.83

SP Plug



Plug provides plugging fitting port

Installation instruction

1. With wrench, 1/4 turn from finger-tight position.
(1/8 turn for 1/8", 3/16", 2, 3, 4 size plug)
2. Remove nut and ferrules from body

Fractional

Part No.	Tube O.D. D (inch)	Width Across Flat H (inch)	Part No.	Tube O.D. D (inch)	Width Across Flat H (inch)
SP - 2	1/8	7/16	SP - 8	1/2	7/8
SP - 3	3/16	1/2	SP - 10	5/8	1
SP - 4	1/4	9/16	SP - 12	3/4	1-1/8
SP - 5	5/16	5/8	SP - 14	7/8	1-1/4
SP - 6	3/8	11/16	SP - 16	1	1-1/2


Plugs Unused port of Metric **SUPERLOK** fittings

Metric

Part No.	Tube O.D. D	Width Across Flat H	Part No.	Tube O.D. D	Width Across Flat H
SP - 2M	2	12	SP - 15M	15	25
SP - 3M	3	12	SP - 16M	16	25
SP - 4M	4	12	SP - 18M	18	30
SP - 6M	6	14	SP - 20M	20	32
SP - 8M	8	16	SP - 22M	22	32
SP - 10M	10	19	SP - 25M	25	38
SP - 12M	12	22			

Plugs Unused port of Fractional **SUPERLOK** fittings

SC Cap



Installation instruction

1. With wrench, 1-1/4 turn from finger-tight position.
(3/4 turn for 1/8", 3/16", 3mm, 4mm)
2. Insert tube end into cap


Connects Caps End of Fractional Tubes

Part No.	Tube O.D. D (inch)	Width Across Flat		A	B	I	L
		h (inch)	H (inch)				
SC - 1	1/16	5/16	5/16	8.63	10.92	11.20	14.98
SC - 2	1/8	7/16	7/16	12.70	15.24	13.46	20.06
SC - 3	3/16	7/16	1/2	13.71	16.00	14.73	21.33
SC - 4	1/4	1/2	9/16	15.24	17.78	16.00	23.36
SC - 5	5/16	9/16	5/8	16.25	18.54	17.01	24.38
SC - 6	3/8	5/8	11/16	16.76	19.30	18.28	25.65
SC - 8	1/2	13/16	7/8	22.86	21.84	19.05	29.21
SC - 10	5/8	15/16	1	24.38	21.84	19.81	29.97
SC - 12	3/4	1-1/16	1-1/8	24.38	21.84	21.33	31.49
SC - 14	7/8	1-3/16	1-1/4	25.90	21.84	23.87	34.03
SC - 16	1	1-3/8	1-1/2	31.24	26.41	26.16	38.35

Connects Metric Tubes

Part No.	Tube O.D. D	Width Across Flat		A	B	I	L	Part No.	Tube O.D. D	Width Across Flat		A	B	I	L
		h	H							h	H				
SC - 2M	2	12	12	12.9	15.3	13.5	20.1	SC - 15M	15	24	25	24.4	22.0	19.8	29.9
SC - 3M	3	12	12	12.9	15.3	13.5	20.1	SC - 16M	16	24	25	24.4	22.0	19.8	29.9
SC - 4M	4	12	12	13.7	16.1	14.7	21.3	SC - 18M	18	27	30	24.4	22.0	21.3	31.4
SC - 6M	6	14	14	15.3	17.7	15.7	23.1	SC - 20M	20	30	32	26.0	22.0	23.9	34.0
SC - 8M	8	15	16	16.2	18.6	17.0	24.5	SC - 22M	22	30	32	26.0	22.0	23.9	34.0
SC - 10M	10	18	19	17.2	19.5	19.0	26.6	SC - 25M	25	35	38	31.3	26.5	26.2	38.5
SC - 12M	12	22	22	22.8	22.0	19.0	29.1								

SN Nut




Fractional

Part No.	Tube O.D. D (inch)	Width Across Flat H (inch)	L	Part No.	Tube O.D. D (inch)	Width Across Flat H (inch)	L
SN - 1	1/16	5/16	7.90	SN - 8	1/2	7/8	17.52
SN - 2	1/8	7/16	11.93	SN - 10	5/8	1	17.52
SN - 3	3/16	1/2	11.93	SN - 12	3/4	1-1/8	17.52
SN - 4	1/4	9/16	12.70	SN - 14	7/8	1-1/4	17.52
SN - 5	5/16	5/8	13.46	SN - 16	1	1-1/2	20.6
SN - 6	3/8	11/16	14.22				

Metric

Part No.	Tube O.D. D	Width Across Flat H	L	Part No.	Tube O.D. D	Width Across Flat H	L
SN - 2M	2	12	11.9	SN - 14M	14	25	17.4
SN - 3M	3	12	11.9	SN - 15M	15	25	17.4
SN - 4M	4	12	11.9	SN - 16M	16	25	17.4
SN - 6M	6	14	12.7	SN - 18M	18	30	17.4
SN - 8M	8	16	13.5	SN - 20M	20	32	17.4
SN - 10M	10	19	15.1	SN - 22M	22	32	17.4
SN - 12M	12	22	17.4	SN - 25M	25	38	20.6

SFF Front Ferrule




Fractional

Part No.	Tube O.D. D (inch)	Part No.	Tube O.D. D (inch)
SFF - 1	1/16	SFF - 8	1/2
SFF - 2	1/8	SFF - 10	5/8
SFF - 3	3/16	SFF - 12	3/4
SFF - 4	1/4	SFF - 14	7/8
SFF - 5	5/16	SFF - 16	1
SFF - 6	3/8		

Metric

Part No.	Tube O.D. D	Part No.	Tube O.D. D
SFF - 2M	2	SFF - 14M	14
SFF - 3M	3	SFF - 15M	15
SFF - 4M	4	SFF - 16M	16
SFF - 6M	6	SFF - 18M	18
SFF - 8M	8	SFF - 20M	20
SFF - 10M	10	SFF - 22M	22
SFF - 12M	12	SFF - 25M	25

SBF Back Ferrule



Fractional

Part No.	Tube O.D. D (inch)	Part No.	Tube O.D. D (inch)	Part No.	Tube O.D. D (inch)
SBF - 1	1/16	SBF - 5	5/16	SBF - 12	3/4
SBF - 2	1/8	SBF - 6	3/8	SBF - 14	7/8
SBF - 3	3/16	SBF - 8	1/2	SBF - 16	1
SBF - 4	1/4	SBF - 10	5/8		

Metric

Part No.	Tube O.D. D	Part No.	Tube O.D. D	Part No.	Tube O.D. D
SBF - 2M	2	SBF - 10M	10	SBF - 18M	18
SBF - 3M	3	SBF - 12M	12	SBF - 20M	20
SBF - 4M	4	SBF - 14M	14	SBF - 22M	22
SBF - 6M	6	SBF - 15M	15	SBF - 25M	25
SBF - 8M	8	SBF - 16M	16		

SFS Ferrule Set





Fractional

Part No.	Tube O.D. D (inch)	Part No.	Tube O.D. D (inch)	Part No.	Tube O.D. D (inch)
SFS - 1	1/16	SFS - 5	5/16	SFS - 12	3/4
SFS - 2	1/8	SFS - 6	3/8	SFS - 14	7/8
SFS - 3	3/16	SFS - 8	1/2	SFS - 16	1
SFS - 4	1/4	SFS - 10	5/8		

Metric

Part No.	Tube O.D. D	Part No.	Tube O.D. D	Part No.	Tube O.D. D
SFS - 2M	2	SFS - 10M	10	SFS - 20M	20
SFS - 3M	3	SFS - 12M	12	SFS - 22M	22
SFS - 4M	4	SFS - 15M	15	SFS - 25M	25
SFS - 6M	6	SFS - 16M	16		
SFS - 8M	8	SFS - 18M	18		

SI Insert




Fractional

Part No.	Tube O.D. (inch)	Tube I.D. (inch)	I.D. of Bore (mm)	Part No.	Tube O.D. (inch)	Tube I.D. (inch)	I.D. of Bore (mm)
SI 3 - 2	3/16	1/8	2.28	SI 8 - 4	1/2	1/4	4.82
SI 4 - 2	1/4	1/8	2.28	SI 8 - 6	1/2	3/8	7.87
SI 4 - 3	1/4	3/16	3.55	SI 10 - 6	5/8	3/8	7.87
SI 5 - 2	5/16	1/8	2.28	SI 10 - 8	5/8	1/2	11.17
SI 5 - 3	5/16	3/16	3.04	SI 12 - 8	3/4	1/2	11.17
SI 5 - 4	5/16	1/4	4.82	SI 12 - 10	3/4	5/8	14.22
SI 6 - 3	3/8	3/16	3.04	SI 16 - 12	1	3/4	17.52
SI 6 - 4	3/8	1/4	4.82				

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change


SBR Bulkhead Retainer

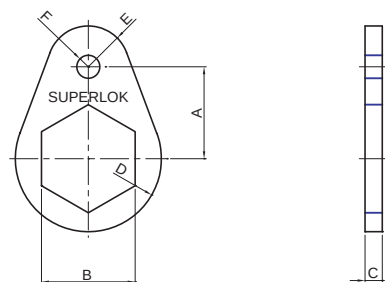

Part No.	A (inch)	B (inch)	C (inch)	D Dia (inch)	E Dia (inch)	F Dia (inch)
SBHU 1-RE	3/8	5/16	1/8	5/16	5/32	5/32
SBHU 2-RE	1/2	1/2	1/8	13/32	7/32	5/32
SBHU 3-RE ①	9/16	9/16	1/8	15/32	1/4	5/32
SBHU 4-RE ②	5/8	5/8	1/8	1/2	9/32	5/32
SBHU 5-RE	1/16	11/16	1/8	9/16	5/16	5/32
SBHU 6-RE	3/4	3/4	1/8	5/8	11/32	5/32
SBHU 8-RE ③	15/16	15/16	1/8	3/4	13/32	7/32
SBHU 10-RE ④	1	1-1/16	1/8	13/16	13/32	7/32
SBHU 12-RE ⑤	1-1/16	1-3/16	1/8	29/32	15/32	7/32
SBHU 14-RE	1-1/8	1-5/16	1/8	1-1/32	17/32	7/32
SBHU 16-RE	1-9/32	1-5/8	1/8	1-5/32	9/16	7/32
SBHU 8M-RE	11/16	18 mm	1/8	9/16	5/16	5/32
SBHU 10M-RE	15/16	22 mm	1/8	3/4	13/32	7/32

- ① Can be used with 3mm and 4mm bulkheads
- ② Can be used with 6mm bulkheads
- ③ Can be used with 12mm bulkheads
- ④ Can be used with 15mm and 16mm bulkheads
- ⑤ Can be used with 18mm bulkheads

SVP Vent Protector



Part No.	T (NPT)	L	L1	d	H (inch)
SVP - 4N	1/4	19.81	14.22	7.11	9/16
SVP - 6N	3/8	20.57	14.22	10.41	11/16
SVP - 8N	1/2	26.16	19.05	12.70	7/8
SVP - 12N	3/4	26.92	19.05	18.29	1-1/16

* ISO Tapered Threads are available upon request

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

Valve Series

- Key Operation Ball Valves
- Key Operation Needle Valves
- Ball Valves
- Integral Bonnet Needle Valves
- Union Bonnet Needle Valves
- Check Valves
- High Pressure Check Valves
- High Pressure Needle Valves
- Plug Valves
- Manifold Valves
- Vacuum Clamps
- Water Regulators
- Flexible Hoses
- Double Block & Bleed Valves
- Swing-Out Ball Valves
- Toggle Valves
- Bleed & Purge Valves
- Quick Connectors
- High Pressure Ball Valves
- Hydraulic Ball Valves
- Trunnion Ball Valves
- Rising Plug Valves
- Relief Valves
- Cryogenic Needle Valves
- Cryogenic Ball Valves
- Micron in-Line Filters
- Gauge Root Valves
- Hydraulic Flange and Components

Fitting Series

Tube Fittings (Compression Type)
Instrument Thread Fittings
Forged Fittings
Bite Type Tube Fittings (DIN2353)
Bite Type Tube Fittings (JIS B2351)
37 Flared Tube Fittings (SAE J514)
O-Ring Face Seal Fittings
Hose Connectors & Push-On Hose Fittings

Electric

MCPD(Molded Case Power Distributor)

BMT Co., Ltd.

21-1 Bukjeong-dong Yangsan
Gyeongsangnam-do Korea
Tel. 82-55-783-1000
Fax. 82-55-783-1111
superlok@superlok.com

경상남도 양산시 북정동 21-1
전화 : 055-783-1000
팩스 : 055-783-1111
superlok@superlok.com